




**PLATINUM  
SMART-HEAT™ ELECTRIC  
MARINE**

---


**AISI 316 MARINE-GRADE STAINLESS STEEL • INDUSTRY-LEADING 5 YEAR WARRANTY**

## PLATINUM SMART-HEAT™ ELECTRIC MARINE

Made in high-quality, AISI316-grade stainless-steel, our Platinum Smart-Heat™ Electric Marine heaters were specifically engineered to provide superior resistance to the corrosive elements of marine and coastal environments. Available in a white or black finish with a variety of mounting options including wall, ceiling, and recessed, this exceptional heater is backed by an industry-leading 5-year warranty.

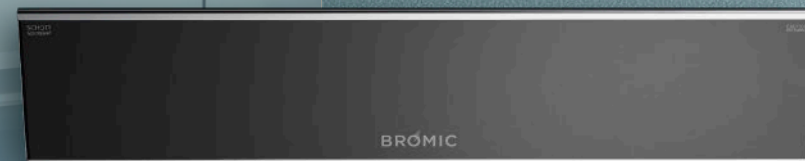

2300W, 3400W & 4500W SERIES  
BLACK | WHITE

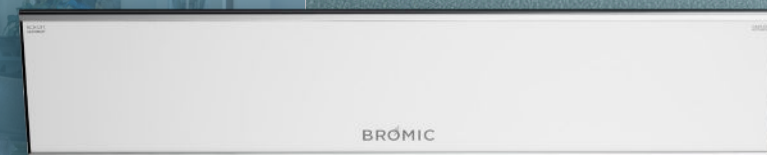

2300W, 3400W & 4500W SERIES  
BLACK | WHITE

## WHY PLATINUM MARINE?

To counteract the hurdles of installing an outdoor heater near the coast where standard stainless steel can rust and deteriorate, Bromic engineered the Platinum Electric Marine heater series.

## AISI 316 MARINE-GRADE STAINLESS STEEL

Built to withstand corrosive environments with high grade materials and a fully enclosed heater body to protect internal elements

## INDUSTRY-LEADING 5-YEAR WARRANTY

Offering peace of mind that the heater is built to last.

## VERSATILE MOUNTING OPTIONS

Wall, ceiling and recessed mounting options.



## WHAT ARE CORROSIVE ELEMENTS?


The high level of relative humidity in coastal areas can add to the deterioration of metals, accelerating the electrochemical reactions that cause rusting and other forms of corrosion. Some of the major threats include those made primarily of sodium chloride such as salt spray from breaking waves and onshore winds, or other atmospheric pollutants like sulfur dioxide within fog, mist and dew.

## CONVENIENT CONTROL OPTIONS

For ease of use.



LOW CLEARANCE RECESS KIT

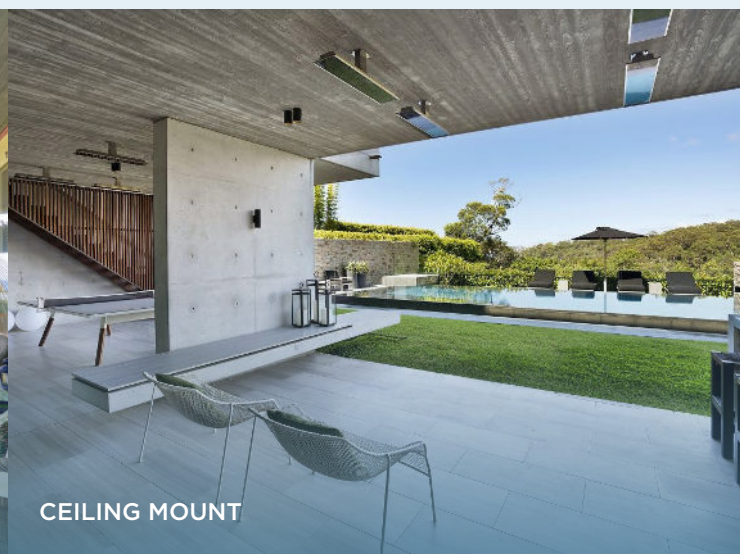

CEILING MOUNT



WALL MOUNT

# SPECIFICATIONS

Reference the specification guide below to help you select the correct solution for your needs.

MODEL NUMBER	2300W SERIES	3400W SERIES	4500W SERIES
PRODUCT CODES PLATINUM ELECTRIC MARINE	BH0320015   BH0320017	BH0320016   BH0320018	BH3622002   BH3622006
FUEL TYPE	ELECTRIC	ELECTRIC	ELECTRIC
COLOR	BLACK   WHITE	BLACK   WHITE	BLACK   WHITE
HEAT AREA	65FT <sup>2</sup>	108FT <sup>2</sup>	143FT <sup>2</sup>
RATED CURRENT**	220 - 240V/9.6A	220 - 240V/14.2A	220 - 240V/18.8A
MINIMUM FLOOR CLEARANCE	WALL 72"   CEILING 96"	WALL 72"   CEILING 96"	WALL 72"   CEILING 96"
<b>MOUNTING OPTIONS</b>			
CEILING MOUNT	INCLUDED	INCLUDED	INCLUDED
WALL MOUNT	INCLUDED	INCLUDED	INCLUDED
RECESS KIT   FLUSH MOUNT	✓	✓	✓
CEILING RECESS KIT PRODUCT CODES	BH3130034	BH3130035	BH3623001
NEW RECESS KIT   LOW CLEARANCE	✓	✓	-
LOW CLEARANCE RECESS KIT PRODUCT CODES	BH3623011	BH3623010	-
CEILING POLE EXTENSION	✓	✓	✓
CEILING POLE (2') PRODUCT CODE	BH3130046	BH3130046	BH3623022
CEILING POLE (4') PRODUCT CODE	BH3130047	BH3130047	BH3623023
FREESTANDING	-	-	-
<b>CONTROL OPTIONS</b>			
ON   OFF	✓	✓	✓
ON   OFF PRODUCT CODE	BH3130010-1	BH3130010-1	BH3130010-1
DIMMER	✓	✓	✓
DIMMER PRODUCT CODE	BH3130011-1	BH3130011-1	BH3130011-1
MASTER REMOTE *	✓	✓	✓
MASTER REMOTE PRODUCT CODE	BH3130012-1	BH3130012-1	BH3130012-1

\* Control up to six zones of heaters with unlimited heaters per zone from a single remote control. Dimmer control required. Works with dimming controllers. Remote control operates within 100ft of heaters.

\*\* Available in 208V and 220-240V configurations.

Measurements displayed within this document are for reference only, for complete requirements see the installation/user manual. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this document are displayed in inches.

EXTEND YOUR COMFORT  
OUTDOORS WITH THE SUPERIOR  
HEAT AND AWARD-WINNING  
DESIGN OF OUR SMART-HEAT™  
OUTDOOR HEATERS.




# DIMENSIONS


With a wide range of sizes available, find the ideal heater to suit your outdoor space.

## PROFILE


2300W



3400W




4500W




## CEILING RECESS


CEILING RECESS FRAME 2300W




CEILING RECESS FRAME 3400W

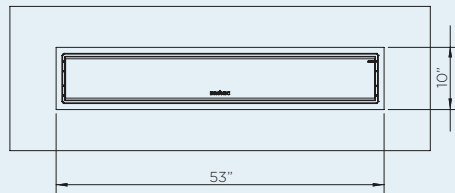


CEILING RECESS FRAME 4500W

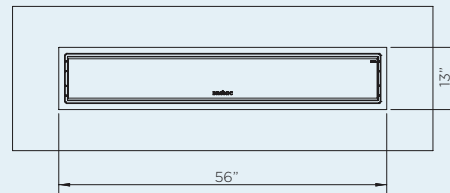


LOW CLEARANCE RECESS KIT  
2300/3400W

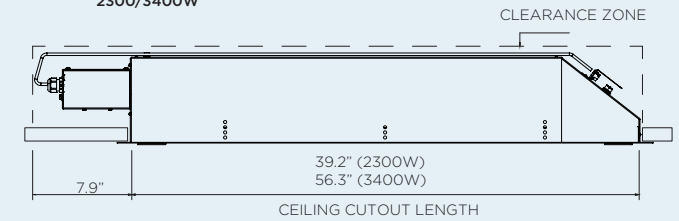






MINIMUM CAVITY OPTION 1  
2300/3400W

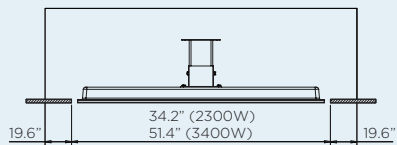

MINIMUM CAVITY OPTION 2  
2300/3400W

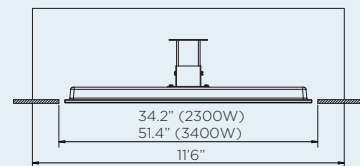

MINIMUM CAVITY FOR 4500W




# HEATING REACH


Creating ideal comfort levels, Bromic heaters offer a variety of heat distribution options to suit your outdoor heating needs.

## HEAT AREA


**2300W SERIES**  
HEATING APPROXIMATELY 65FT<sup>2</sup>  
2300W HEATING POWER

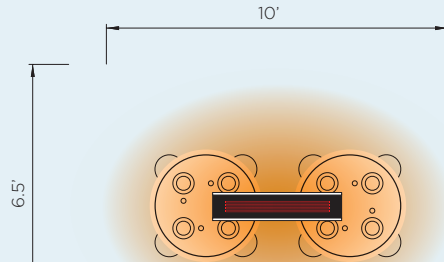

**3400W SERIES**  
HEATING APPROXIMATELY 108FT<sup>2</sup>  
3400W HEATING POWER

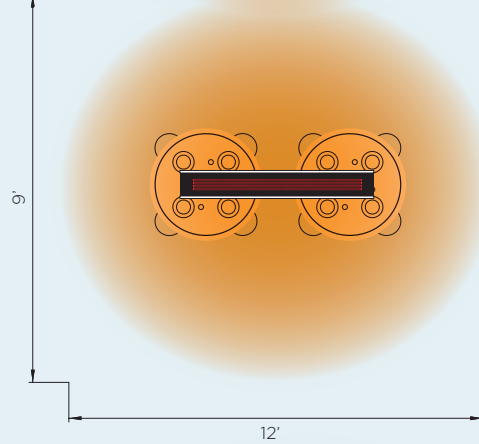

**4500W SERIES**  
HEATING APPROXIMATELY 143FT<sup>2</sup>  
4500W HEATING POWER

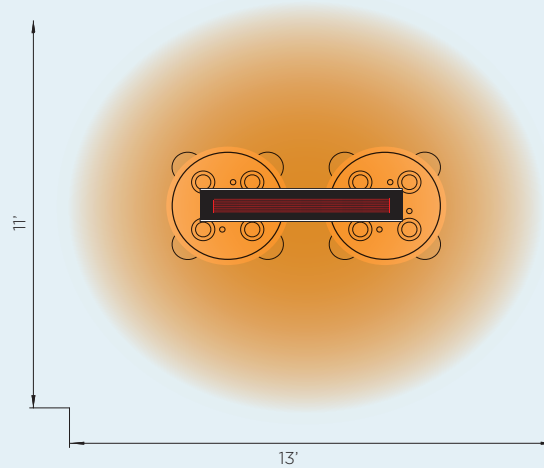


**VERSATILE MOUNTING SOLUTION**

Ability to wall-mount, ceiling-mount, or recess using either the Standard or Low Clearance Recess Kit.

**HIGH PERFORMANCE STAINLESS-STEEL CONSTRUCTION**

Premium 316 grade stainless-steel suitable for marine and coastal environments.

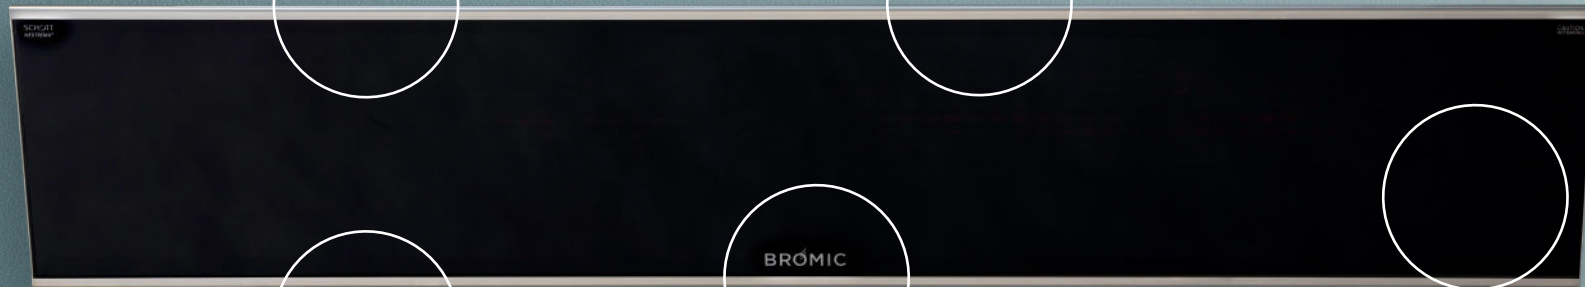

**CLEAN, COMPACT AND ELEGANT DESIGN**

Minimized light emissions and easy to clean in a black or white finish.

**DURABILITY YOU CAN TRUST**

Backed by an industry-leading 5-year warranty.

**SEALED ELEMENT**

Sealed compartment with thin film elements to prevent corrosion.



COMPATIBLE WITH  
SMART-WIRELESS  
TECHNOLOGY





**BROMIC**  
HEATING

**BROMIC.COM**

ASIA PACIFIC | NORTH AMERICA | EUROPE

Bromic pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.