



PLATINUM SMART-HEAT™ GAS



KEY FEATURES

- ▶ **Efficient Heat Distribution:** The signature ceramic-glass screen ensures even heat coverage across large areas, enhancing comfort.
- ▶ **High Heating Capacity:** Available in 23,600 BTU and 39,800 BTU models, effectively warming outdoor areas up to 215 ft².
- ▶ **Durable Construction:** Built with premium materials, including a sleek ceramic glass screen and a fully enclosed body, ensuring longevity and reliability.
- ▶ **High Wind Resistance:** Designed to maintain performance in wind speeds up to 12 mph, ensuring consistent heating in outdoor environments.

MODEL OPTIONS




300



500

MOUNTING OPTIONS



Wall Mounted




Ceiling Mounted

DIMENSIONS

FRONT PROFILE (WITH HEAT DEFLECTOR)



300 SERIES



500 SERIES


SIDE PROFILE (WITH HEAT DEFLECTOR)



FRONT PROFILE (WITHOUT HEAT DEFLECTOR)




300 SERIES



500 SERIES

SIDE PROFILE (WITHOUT HEAT DEFLECTOR)



Discover more about *Platinum Smart-Heat™ Gas*

Learn more at bromic.com

BROMIC
HEATING




SPECIFICATIONS

PRODUCT NUMBER	MODEL	FUEL SOURCE	HEAT AREA	WEIGHT	RATED CURRENT	MINIMUM FLOOR CLEARANCE	APPROVAL CERTIFICATION	IP RATING	CONTROL OPTIONS
BH0110001-1 BH0110002-1	300	NG & LPG	160ft ²	33lbs.	110V/2A	96"	Intertek 4009079	IPX4	Affinity On/Off Manual Wall Switch
BH0110003-1 BH0110004-1	500	NG & LPG	215ft ²	44lbs.	110V/2A				


CLEARANCES

INCLUDED MOUNT

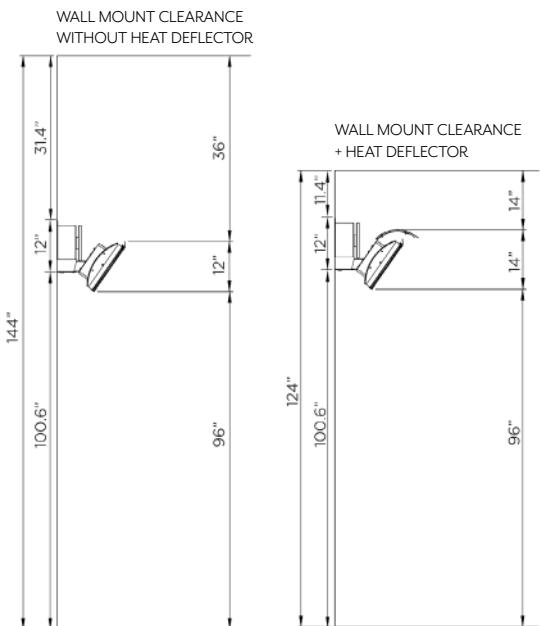

MOUNTING ACCESSORIES

(AVAILABLE IN 9.69", 13.62", 17.56", 25.43", 33.31" AND 41.18")

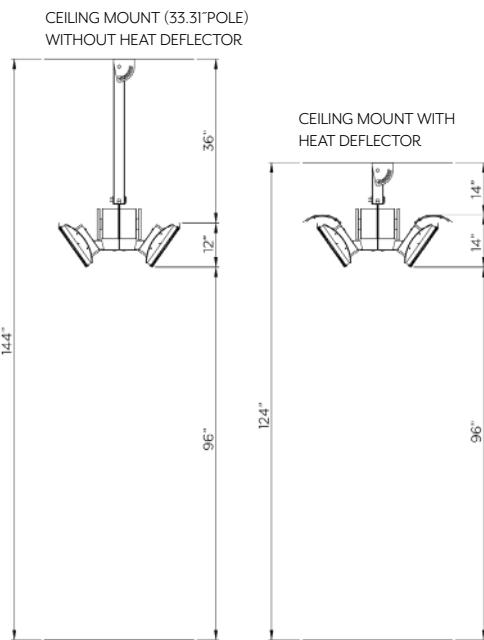

WALL BRACKET (INCLUDED)

