

# PLATINUM SMART-HEAT™ GAS



## KEY FEATURES

- ▶ **Efficient Heat Distribution:** The signature ceramic-glass screen ensures even heat coverage across large areas, enhancing comfort
- ▶ **High Heating Capacity:** Available in 25 MJ and 42 MJ models, effectively warming outdoor areas up to 20 m<sup>2</sup>
- ▶ **Durable Construction:** Built with premium materials, including a sleek ceramic glass screen and a fully enclosed body, ensuring longevity and reliability
- ▶ **High Wind Resistance:** Designed to maintain performance in wind speeds up to 20 km/h, ensuring consistent heating in outdoor environments.

## MODEL OPTIONS





300




500

## DIMENSIONS

FRONT PROFILE (WITH HEAT DEFLECTOR)



SIDE PROFILE (WITH HEAT DEFLECTOR)



## MOUNTING OPTIONS





Wall Mounted




Ceiling Mounted

FRONT PROFILE (WITHOUT HEAT DEFLECTOR)



SIDE PROFILE (WITHOUT HEAT DEFLECTOR)



Discover more about *Platinum Smart-Heat™ Gas*

Learn more at [bromic.com](https://bromic.com)


**BROMIC**  
HEATING

## SPECIFICATIONS

PRODUCT NUMBER	MODEL	FUEL SOURCE	HEAT AREA	WEIGHT	RATED CURRENT	MINIMUM FLOOR CLEARANCE	APPROVAL CERTIFICATION	IP RATING	CONTROL OPTIONS
Various	300	NG & LPG	12m <sup>2</sup>	15kgs	220-240V/2A	2000mm	UKCA-Intertek UK-GZH-0359-0000091	IPX4	Affinity On/Off Manual Wall Switch
Various	500	NG & LPG	20m <sup>2</sup>	20kgs	220-240V/2A				


## CLEARANCES

### INCLUDED MOUNT

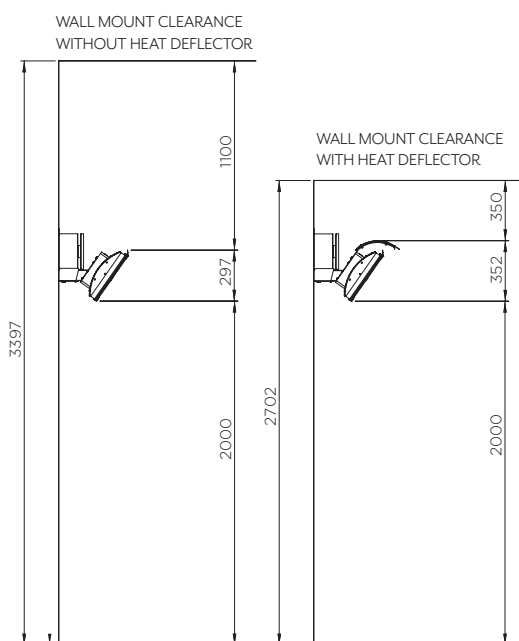

### MOUNTING ACCESSORIES

(AVAILABLE IN 246mm, 346mm, 446mm, 646mm, 846mm AND 1046mm)

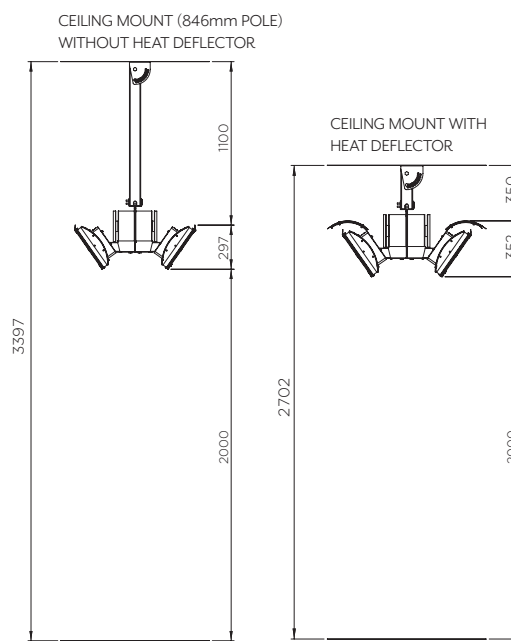

### WALL BRACKET (INCLUDED)

