

BROMIC[®]
HEATING


BROMIC SMART-HEAT™

Divided into our distinct Platinum and Tungsten ranges, all Bronic outdoor heaters are designed and engineered in-house and are constructed from premium materials to create products that strike the perfect balance between performance, reliability and beauty.

BRÖMIC


PLATINUM SMART-HEAT™ ELECTRIC
WITH OPTIONAL RECESS KIT

SEAMLESS INTEGRATION OF
MODERN CLEAN LINES, MINIMALISTIC
DESIGN AND QUALITY MATERIALS
ACHIEVES INNOVATIVE STYLING AND
TECHNICAL PERFORMANCE.

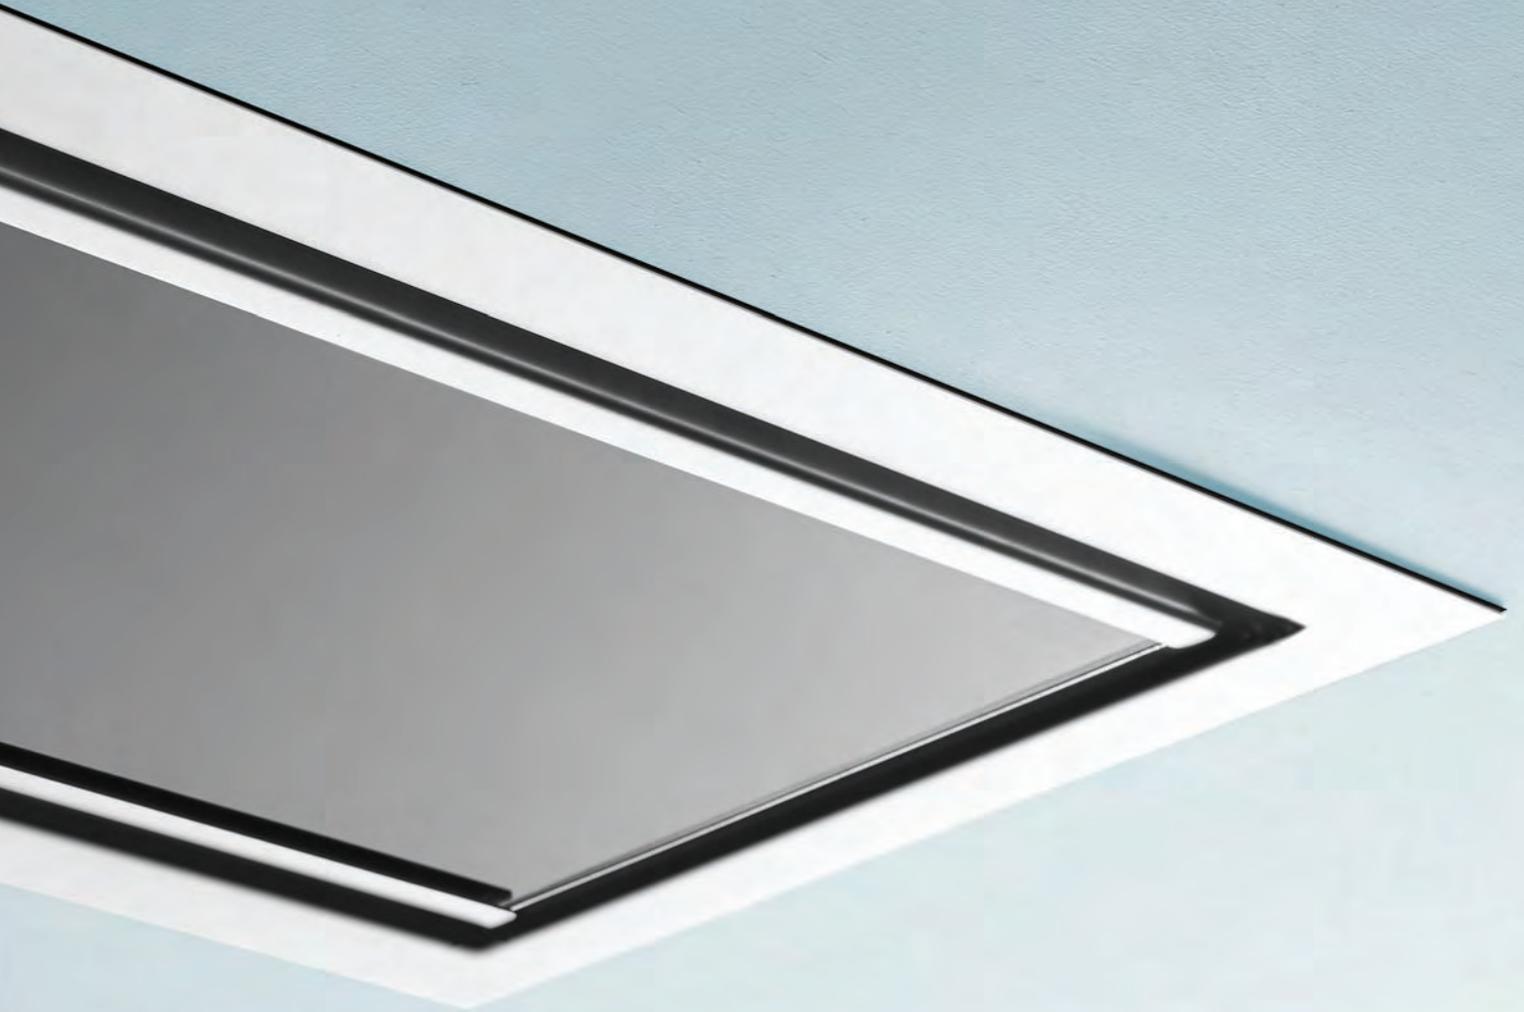



PLATINUM
SMART-HEAT™ ELECTRIC

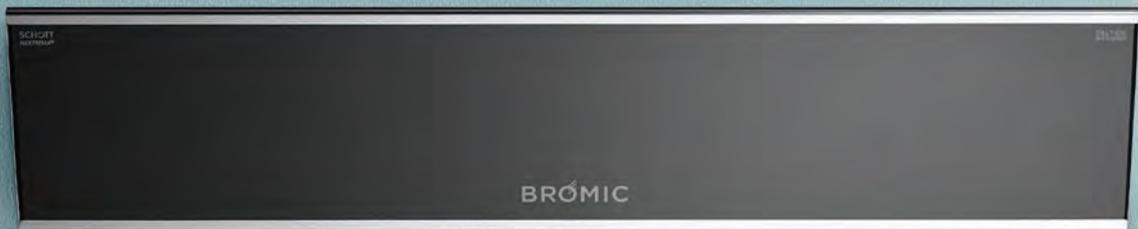

Available in black and white, our Platinum Smart-Heat™ Electric heater is specifically suited for low-clearance and design-focused spaces in mind. This slim-line, stainless steel unit spreads comfort evenly in its space, all while minimising light emission and blending seamlessly into the background with our recess mounting solutions.








PLATINUM SMART-HEAT™ GAS




The Platinum Smart-Heat™ Gas heater series spreads heat and comfort evenly in all areas, with a soft and soothing red glow. Built with pure premium materials and designed with elegance, there is no compromise on performance, reliability and beauty.

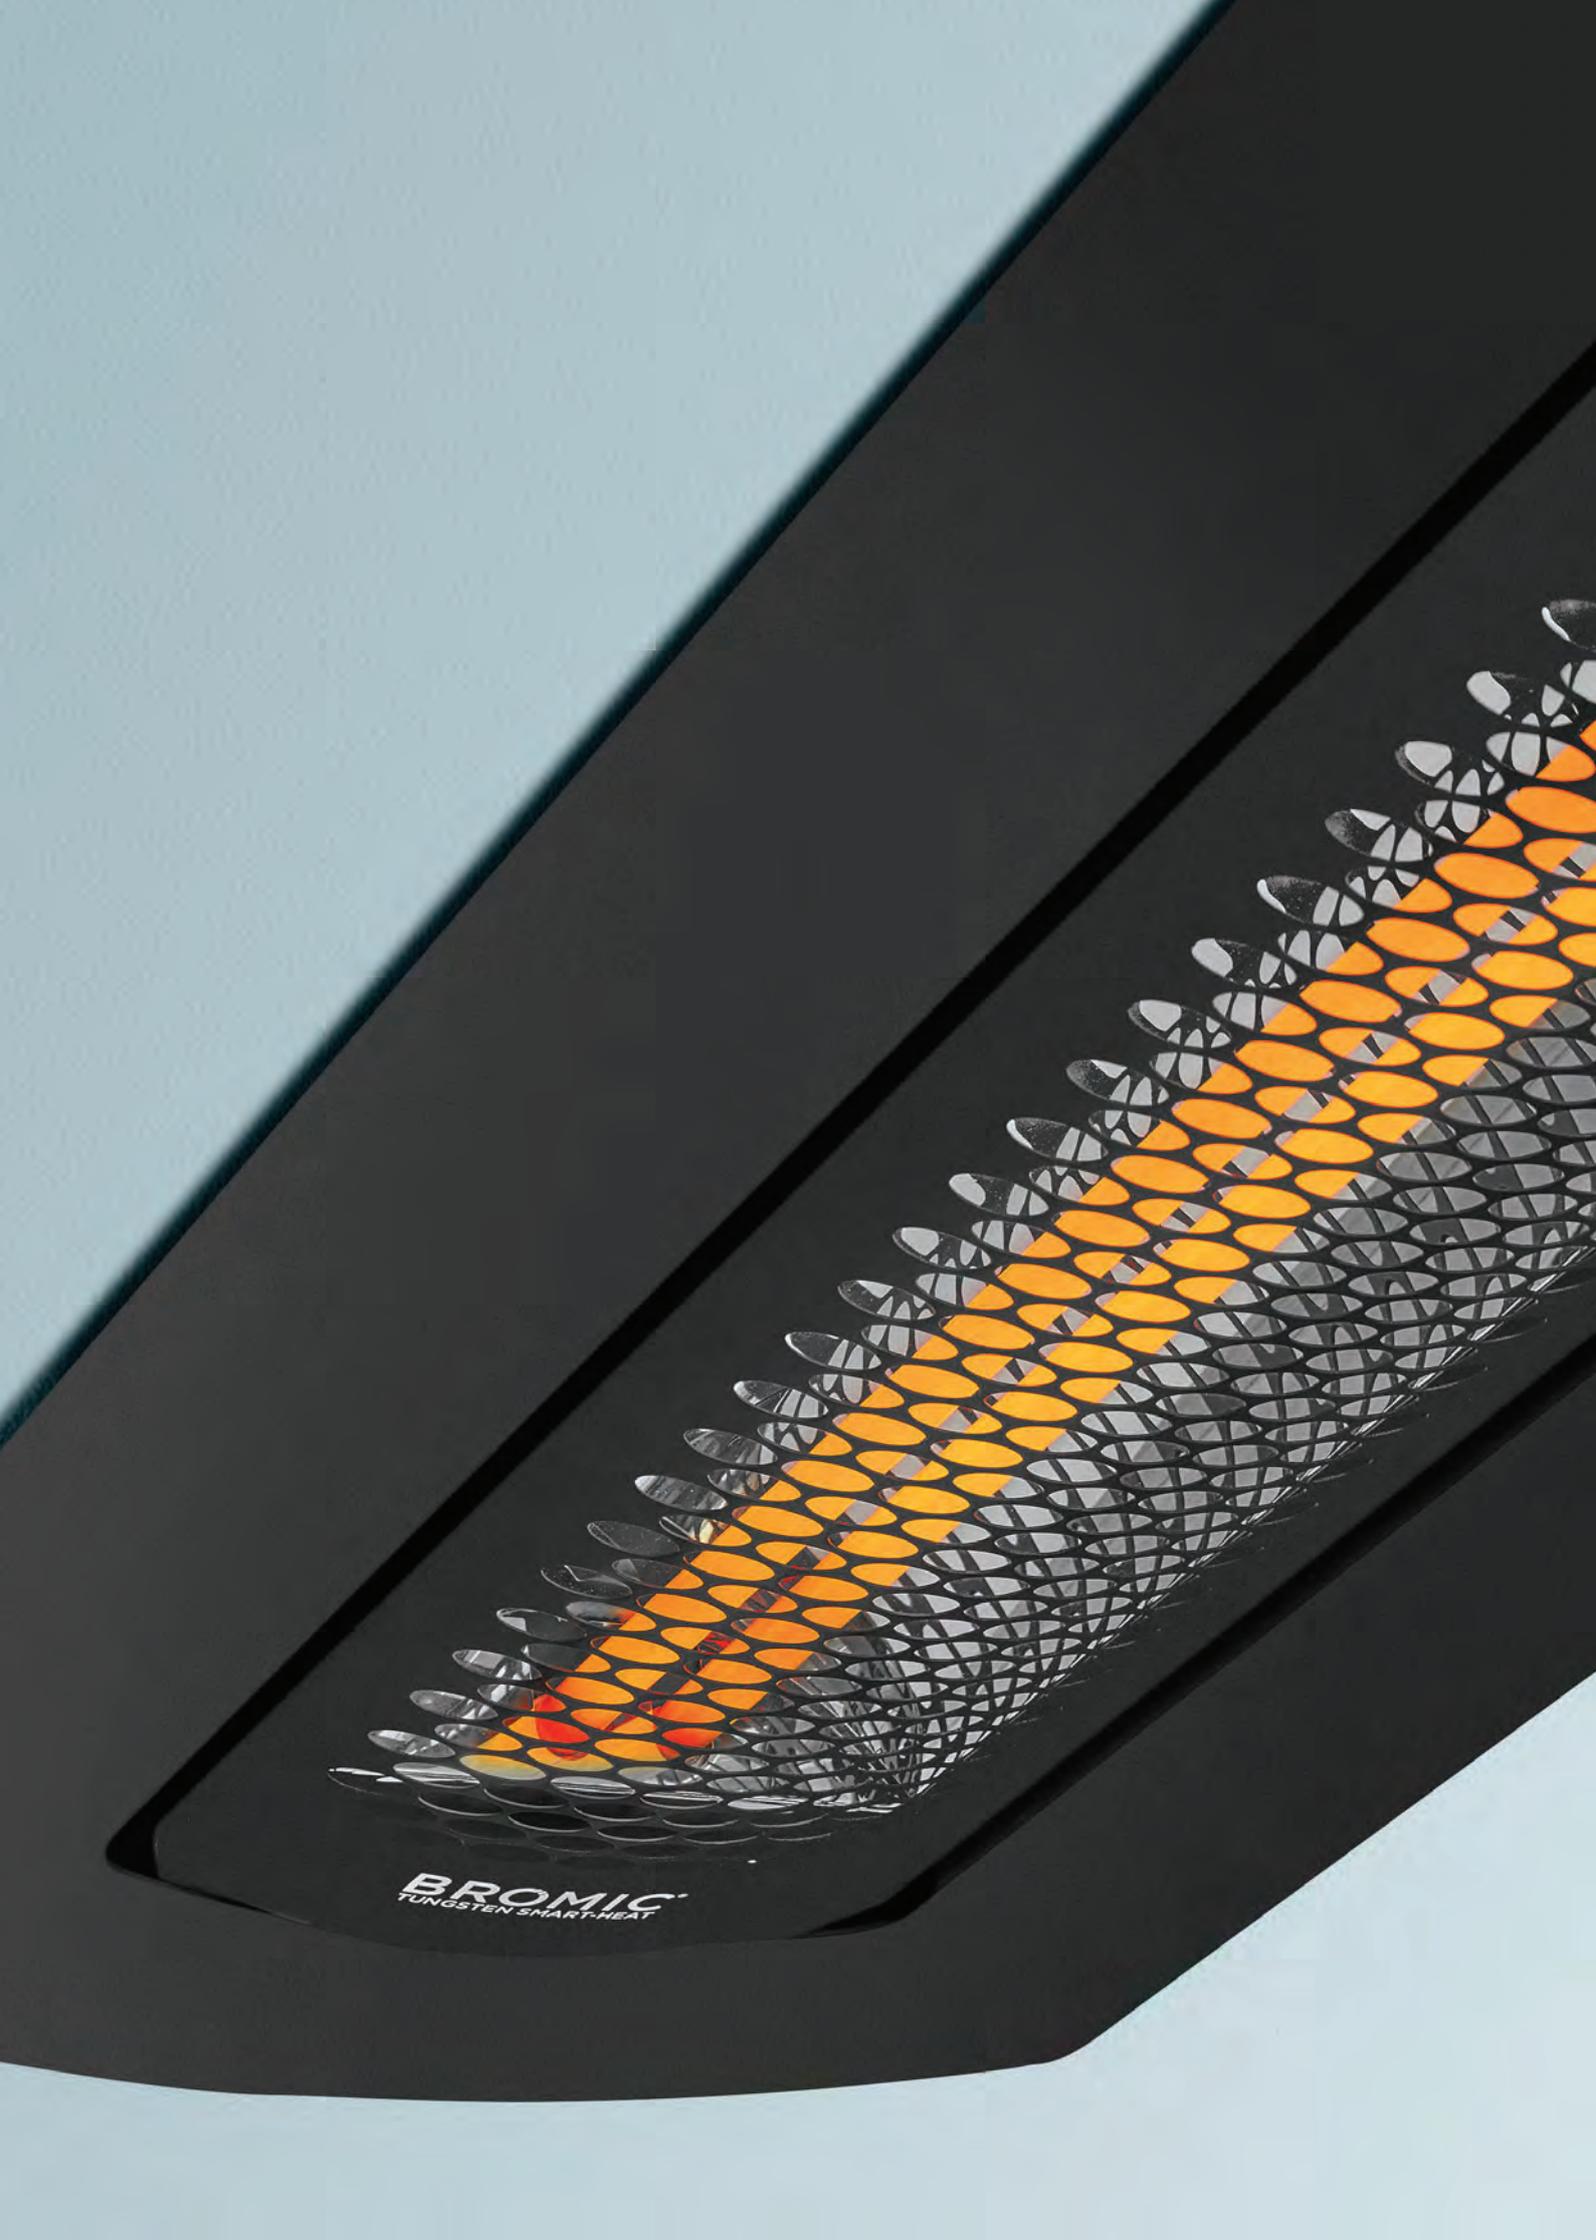


BROMIC
TUNGSTEN SMART-HEAT


TUNGSTEN SMART-HEAT™ ELECTRIC

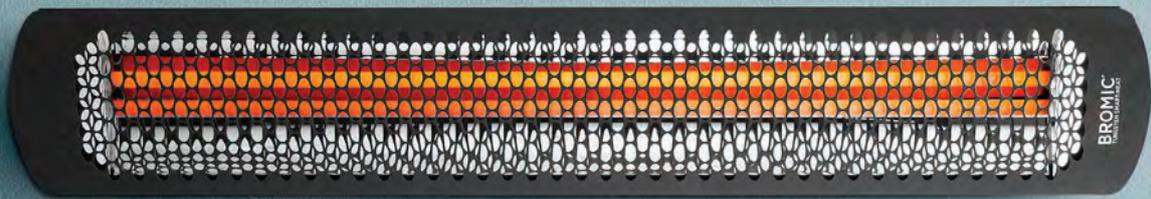

Our Tungsten Smart-Heat™ Electric series offers high performance radiant heating to outdoor and semi-enclosed spaces alike, with an industrial design style. It also boasts a high-temperature coating to suit all environments. With a stainless-steel construction, its durable element will emit a soft red glow to create a warm ambience in your space.

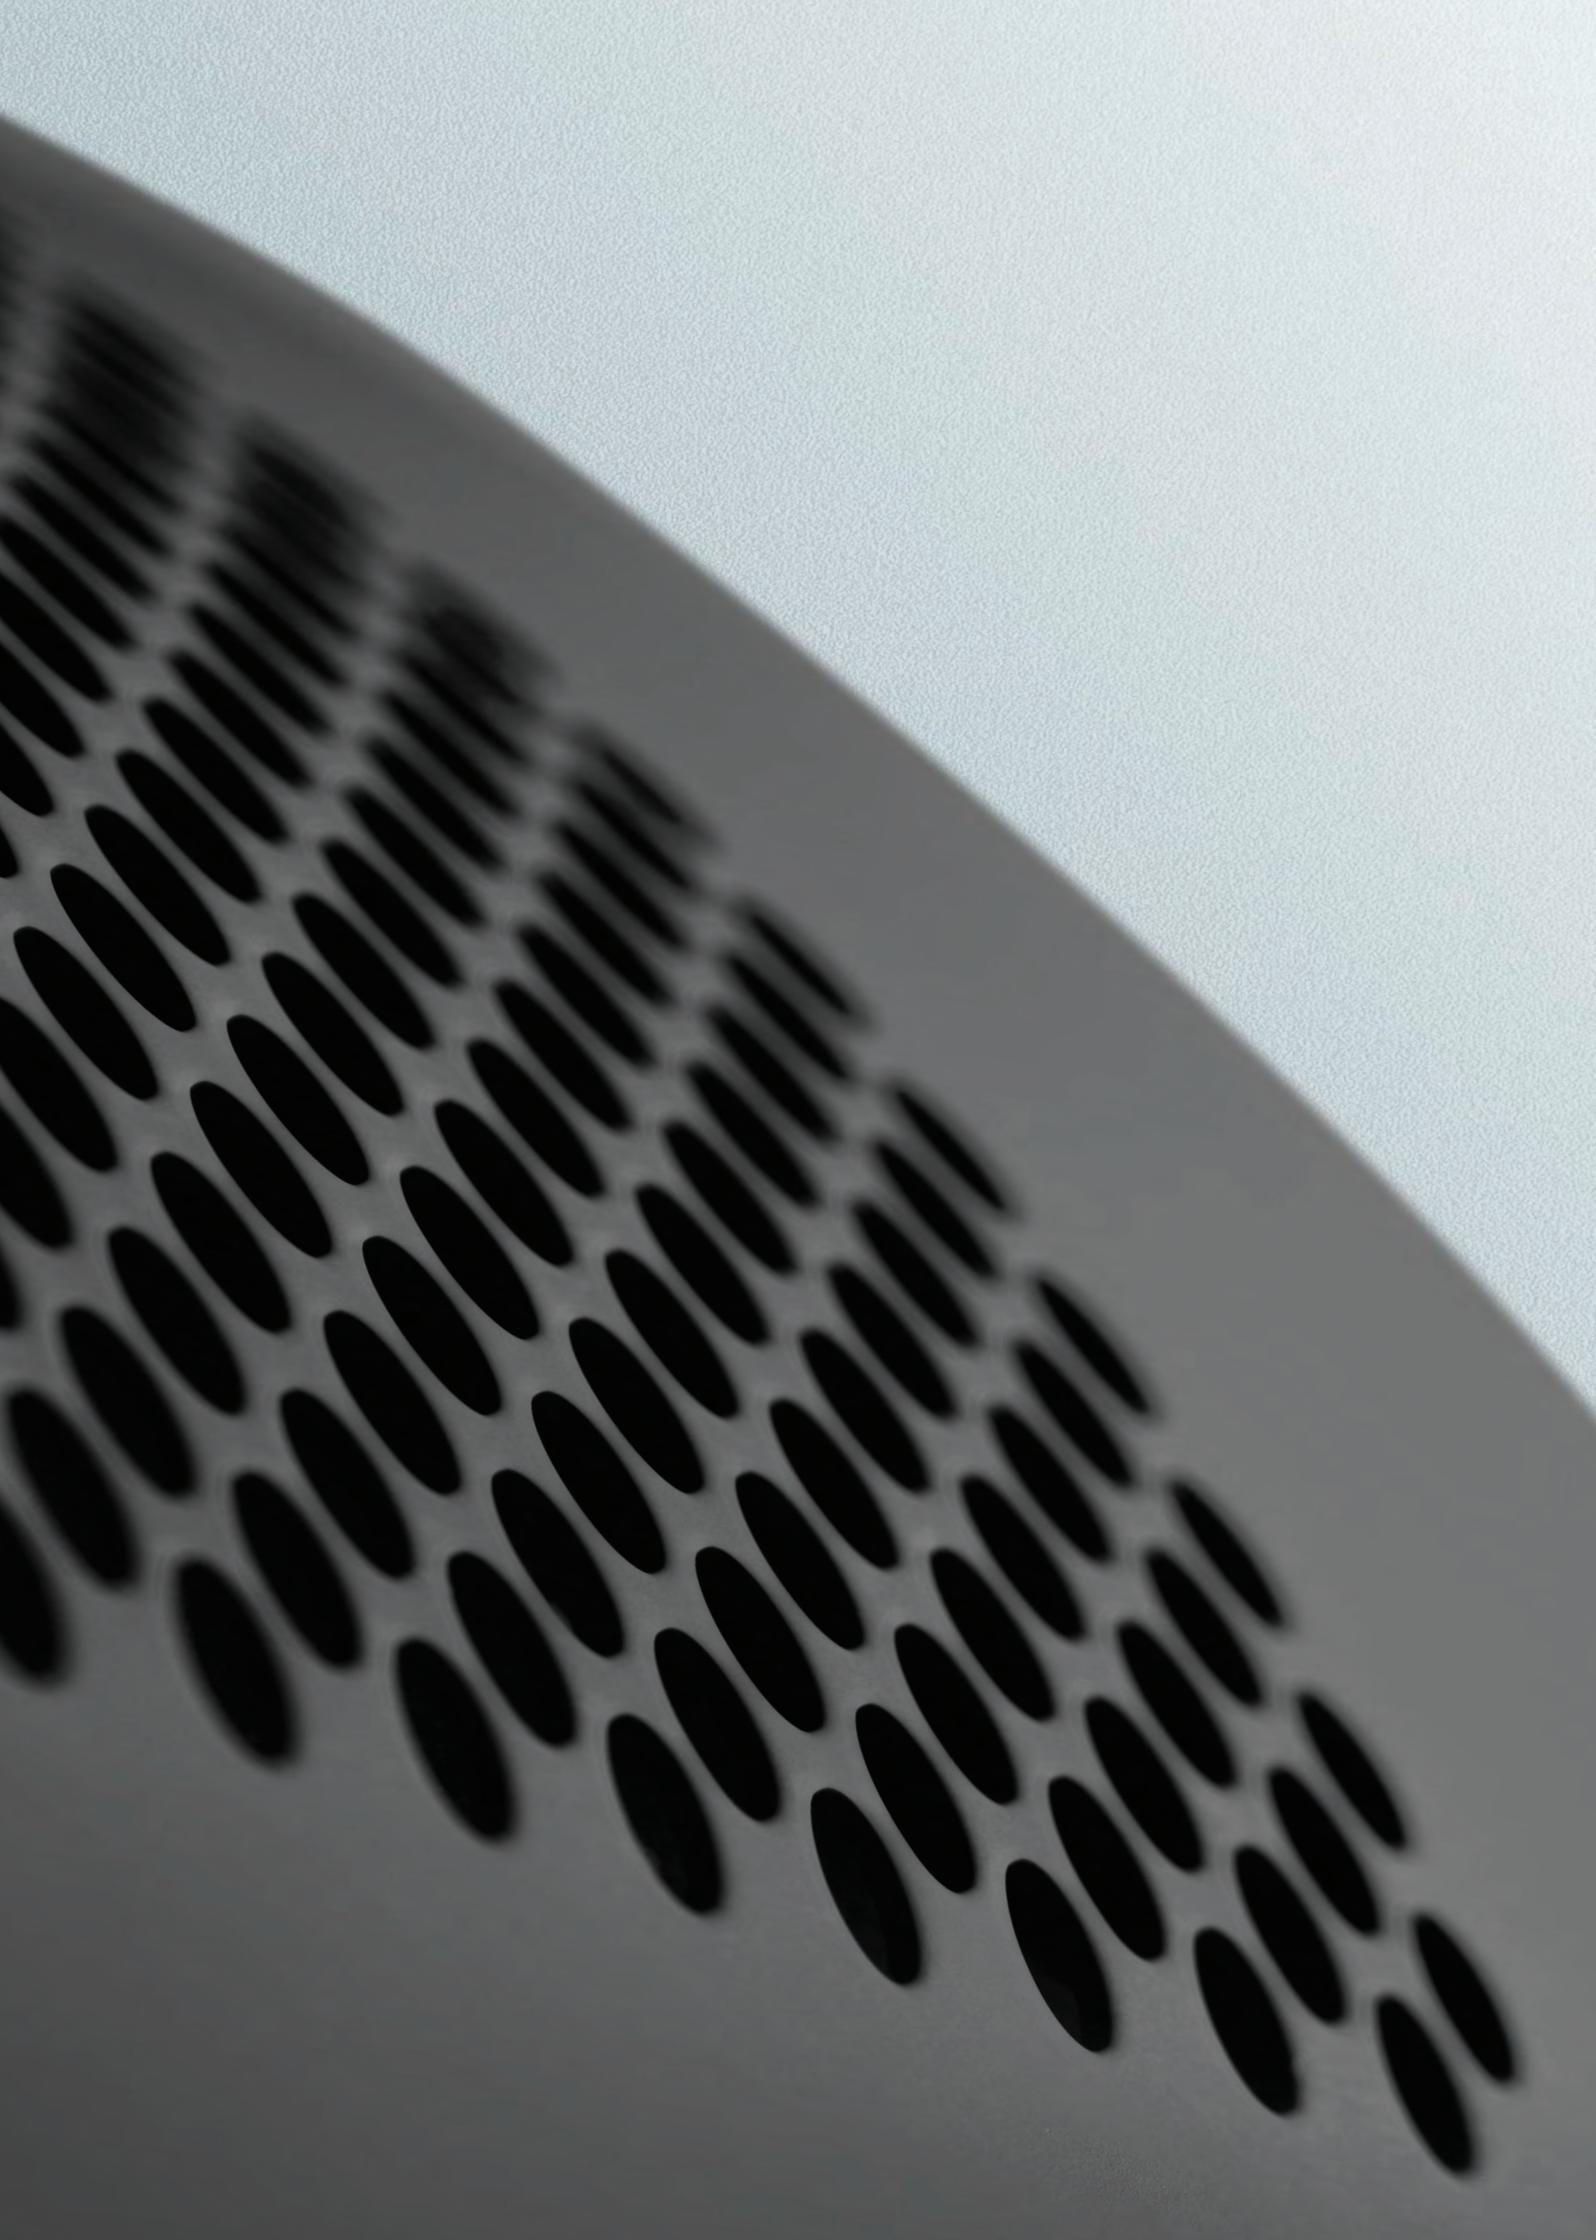

TUNGSTEN SMART-HEAT™ GAS

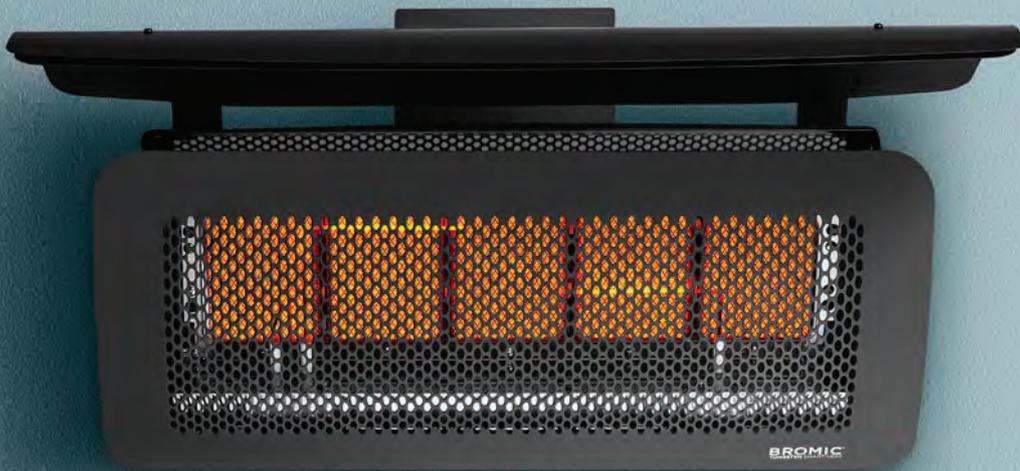

Our Tungsten Smart-Heat™ Gas heater has a durable, soft flowing curved facia and engineered body, which produces formidable heat to create a truly comfortable outdoor space. Its easy pivot arm allows for greater positioning and directional heat control. This heater also has a range of accessories available to provide versatility in mounting & controller options.





OUR DEDICATION TO INNOVATION IN
QUALITY AND DESIGN, ALLOWS US TO
SOLVE A WIDE ARRAY OF REAL-WORLD
CHALLENGES SUCH AS CLIMATE,
EFFICIENCY AND ENVIRONMENT.



TUNGSTEN
SMART-HEAT™ PORTABLE

It's neutral black finish, and award-winning design makes it a piece of modern art. The Tungsten Smart-Heat™ Portable heater offers efficient directional heat and a versatile heating solution for the outdoor settings. It's modular construction with built-in wheels allows for easily manoeuvrability throughout tighter spaces.



**SWITCH ON.
GO WIRELESS.**

SMART-HEAT™ WIRELESS CONTROLLERS

With the option to connect groups of heaters from a single point as well as dimming heating outputs, the Smart-Heat™ range of controllers provide a simple, yet powerful solution to controlling your environment.

Learn more about our wireless control options
bromic.com/gowireless



ON | OFF 4-CHANNEL REMOTE (GAS & ELECTRIC)

The Bromic Smart-Heat Wireless On | Off Controller can switch power supply to two separate outputs, enabling independent 'On | Off' wireless control.



DIMMER CONTROLLER (ELECTRIC ONLY)

The Bromic Smart-Heat Wireless Dimmer Controller allows you to adjust the heat from 1-100% for perfect comfort and complete flexibility.

PLATINUM SMART-HEAT™ GAS

MODEL NUMBER	300 SERIES	500 SERIES
FUEL TYPE	LPG NG	LPG NG
COLOUR	BLACK	BLACK
HEAT AREA	15M ²	20M ²
ELECTRICAL CONNECTION	220 - 240 Va.c.	220 - 240 Va.c
HEAT OUTPUT	25MJ	42MJ
MINIMUM FLOOR CLEARANCE	2,000MM	2,000MM

MOUNTING OPTIONS


CEILING MOUNT	✓	✓
WALL MOUNT	✓	✓
RECESSED FLUSH MOUNT	-	-
CEILING POLE MOUNT	✓	✓
FREESTANDING	-	-

CONTROL OPTIONS


ON OFF	✓	✓
DIMMER	-	-
MASTER REMOTE	-	-

Measurements displayed within this catalogue are minimum requirements for installation.
Bromic takes no responsibility for incorrect or non-compliant installations.
All measurement in this catalogue are displayed in mm.


PRODUCT MEASUREMENTS

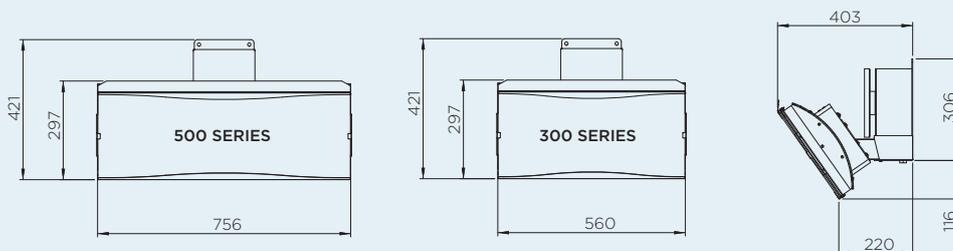


PRODUCT MEASUREMENTS WITH HEAT DEFLECTOR

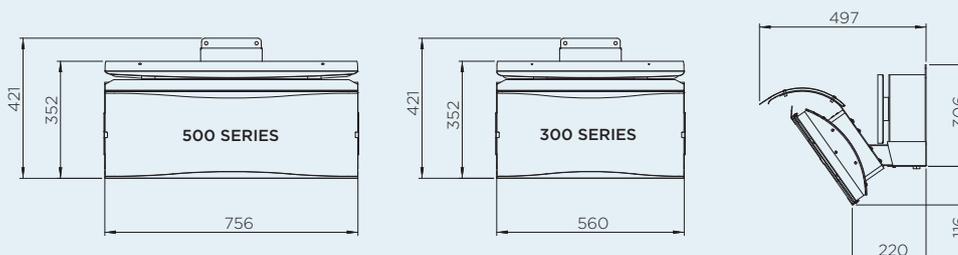


CEILING & WALL MOUNT CLEARANCE

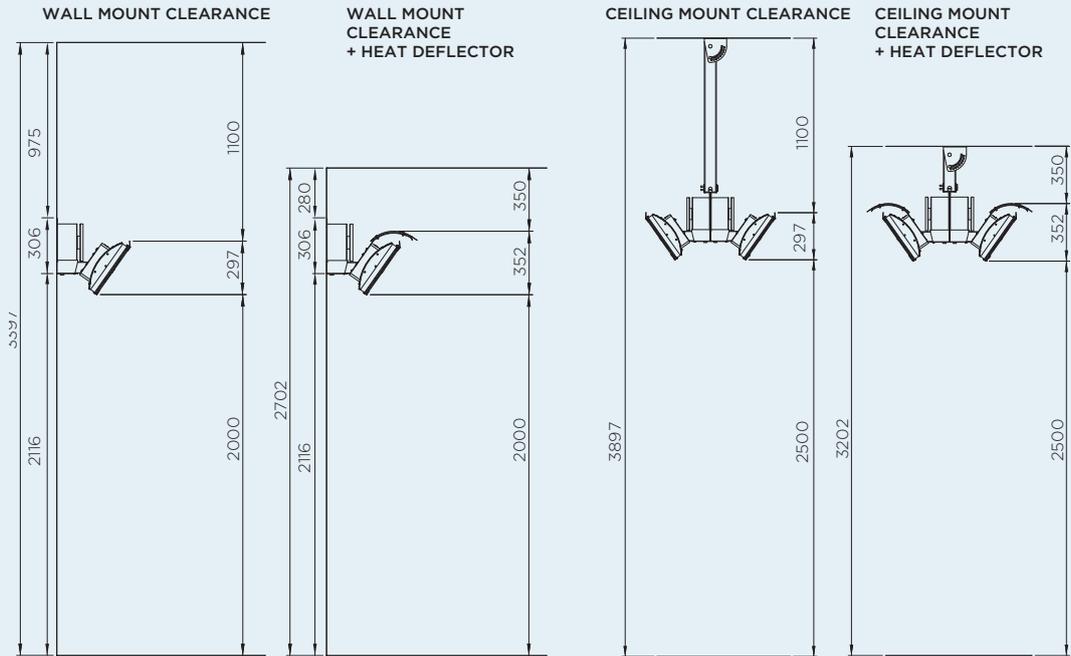

WALL BRACKET



HEAT AREA

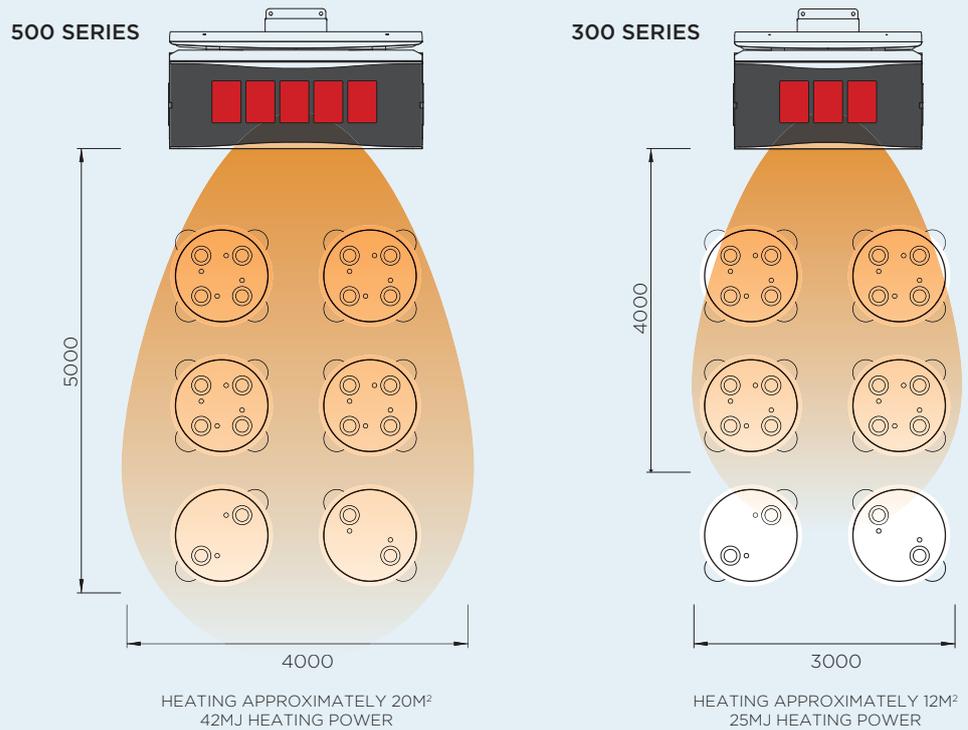

PLATINUM SMART-HEAT™ ELECTRIC

MODEL NUMBER	2300W SERIES	3400W SERIES
FUEL TYPE	ELECTRIC	ELECTRIC
COLOUR	BLACK WHITE	BLACK WHITE
HEAT AREA	6M ²	10M ²
RATED CURRENT	220 - 240V/9.6A	220 - 240V/14.2A
MINIMUM FLOOR CLEARANCE	WALL 1800 CEILING 2400	WALL 1800 CEILING 2400

MOUNTING OPTIONS

CEILING MOUNT	✓	✓
WALL MOUNT	✓	✓
RECESSED FLUSH MOUNT	✓	✓
CEILING POLE MOUNT	✓	✓
FREESTANDING	-	-

CONTROL OPTIONS


ON OFF	✓	✓
DIMMER	✓	✓
MASTER REMOTE *	✓	✓

Measurements displayed within this catalogue are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this catalogue are displayed in mm.


* Controls up to six zones of heaters with unlimited heaters per zone from a single control. Works only with dimming controllers. Control operates within 30m of heaters.

PRODUCT MEASUREMENTS

2300W




3400W

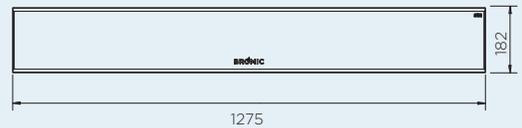


CEILING RECESS KIT

CEILING RECESS FRAME 2300W

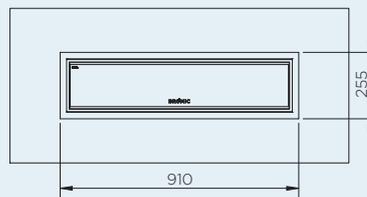



CEILING RECESS FRAME 3400W

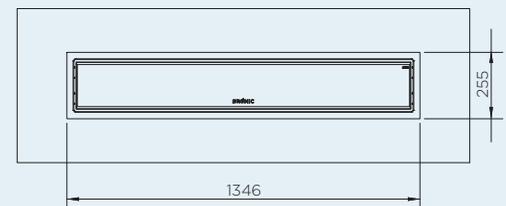



CEILING CAVITY GUIDE

MINIMUM CAVITY SIZE FOR BOTH 2300W & 3400W MODELS

OPTION 1 - STANDARD CAVITY SPACE

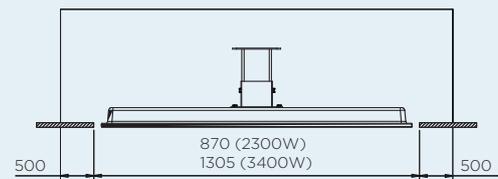


OPTION 2 - NARROW CAVITY SPACE

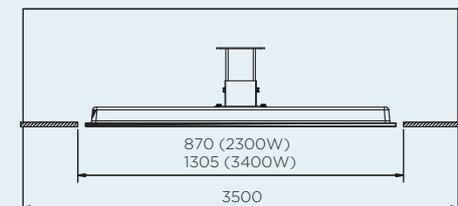


CEILING & WALL MOUNT CLEARANCE


CEILING MOUNT CLEARANCE

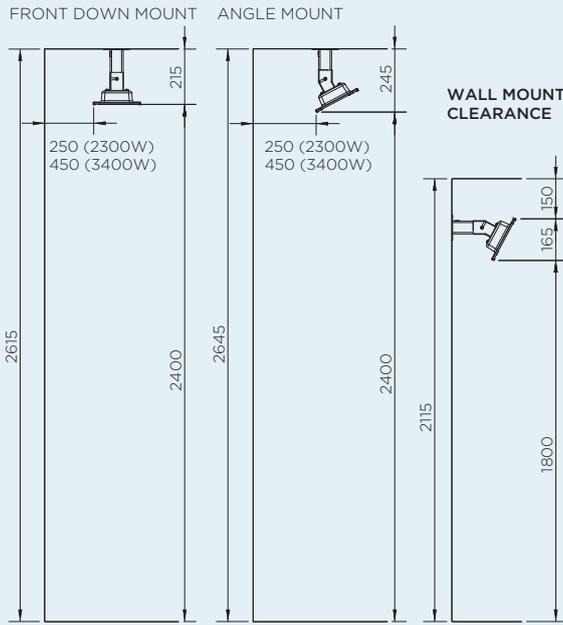


CEILING POLE CLEARANCE

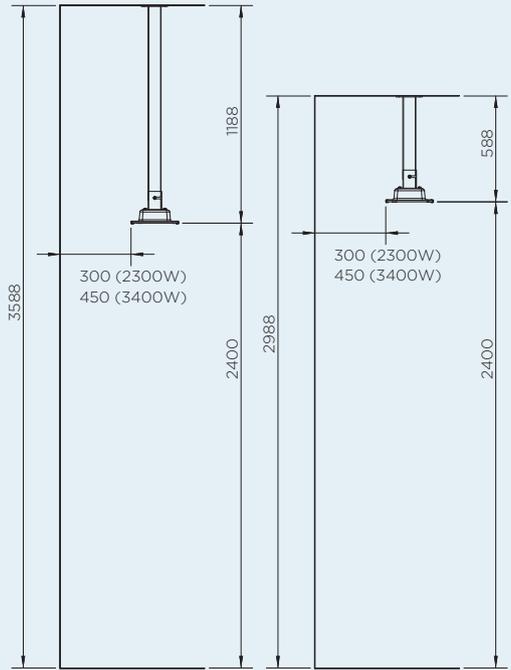

WALL BRACKET (INCLUDED)




CEILING BRACKET (INCLUDED)



HEAT AREA

2300W SERIES
HEATING APPROXIMATELY 6M²
2300W HEATING POWER

3400W SERIES
HEATING APPROXIMATELY 10M²
3400W HEATING POWER

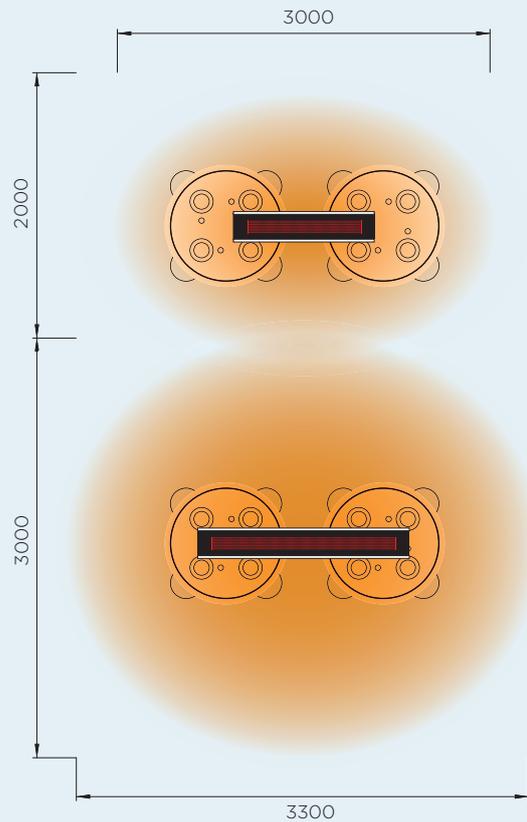

TUNGSTEN SMART-HEAT™ GAS

MODEL NUMBER	300 SERIES	500 SERIES
FUEL TYPE	LPG NG	LPG NG
COLOUR	BLACK	BLACK
HEAT AREA	15M ²	20M ²
ELECTRICAL CONNECTION	220 - 240 Va.c.	220 - 240 Va.c
HEAT OUTPUT	25MJ	42MJ
MINIMUM FLOOR CLEARANCE	2000MM	2000MM

MOUNTING OPTIONS


CEILING MOUNT	✓	✓
WALL MOUNT	✓	✓
RECESSED FLUSH MOUNT	-	-
CEILING POLE MOUNT	✓	✓
FREESTANDING	-	-

CONTROL OPTIONS


ON OFF	✓	✓
DIMMER	-	-
MASTER REMOTE	-	-

Measurements displayed within this catalogue are minimum requirements for installation.
 Bromic takes no responsibility for incorrect or non-compliant installations.
 All measurement in this catalogue are displayed in mm.


PRODUCT MEASUREMENTS

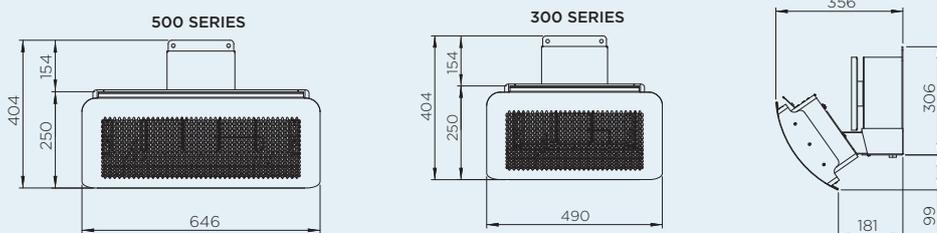


PRODUCT MEASUREMENTS WITH HEAT DEFLECTOR

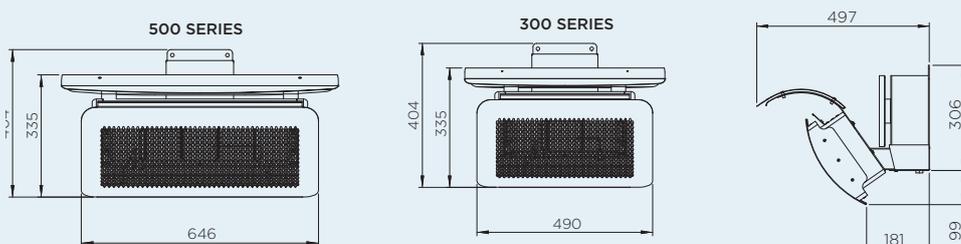


CEILING & WALL MOUNT CLEARANCE

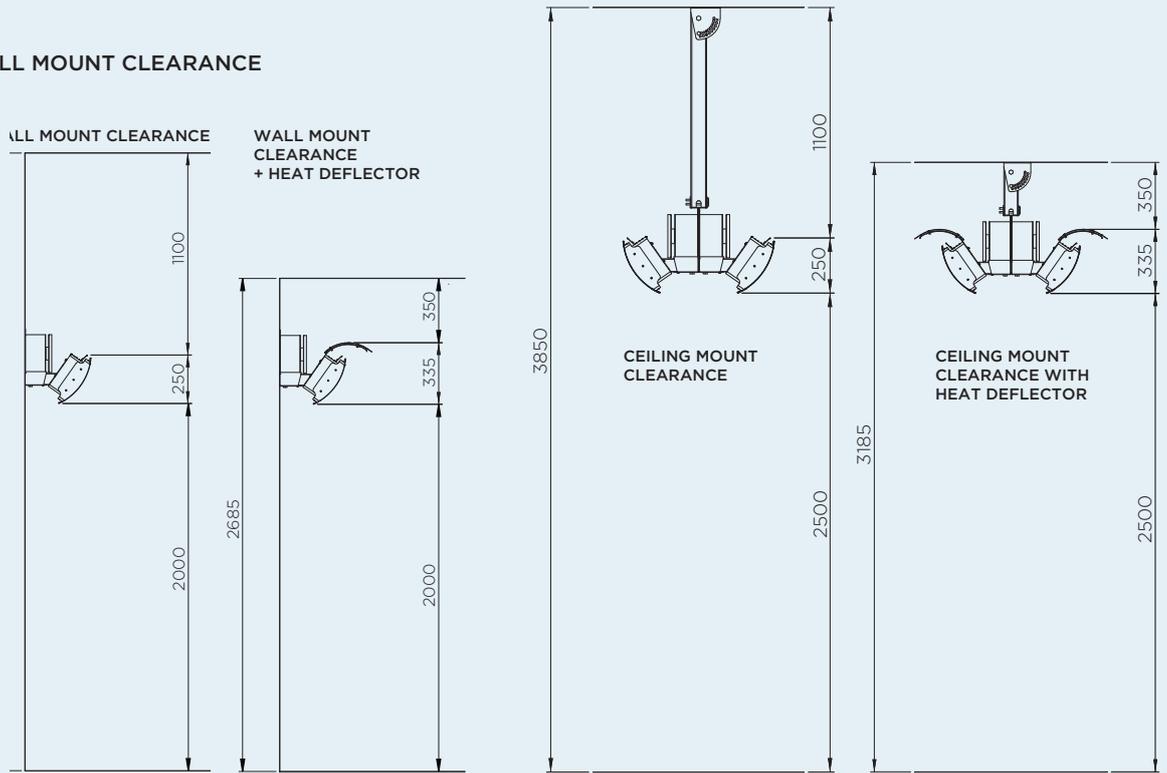

WALL BRACKET



HEAT AREA

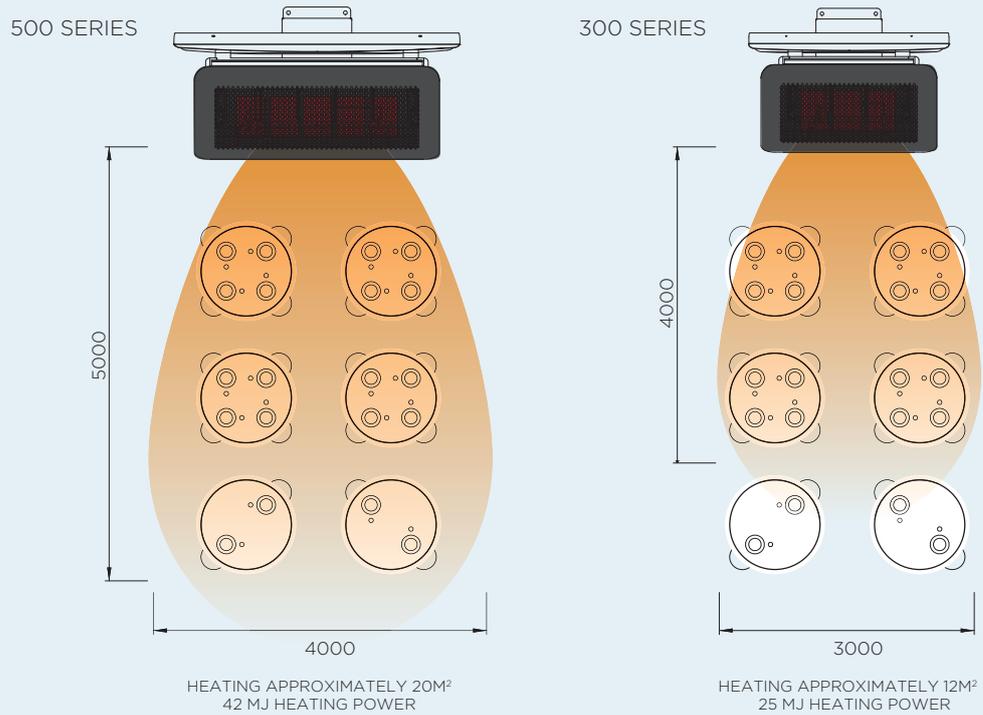

TUNGSTEN SMART-HEAT™ ELECTRIC

MODEL NUMBER	2000 SERIES	3000 SERIES	4000 SERIES	6000 SERIES
FUEL TYPE	ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC
COLOUR	BLACK WHITE#	BLACK WHITE#	BLACK WHITE#	BLACK WHITE#
HEAT AREA	6M ²	9M ²	12M ²	15M ²
RATED CURRENT	220 - 240V/8.3A	220 - 240V/12.5A	220 - 240V/16.6A	220 - 240V/25A
MINIMUM FLOOR CLEARANCE	WALL 1800 MM CEILING 2400 MM		WALL 1800 MM CEILING 2400 MM	

MOUNTING OPTIONS

CEILING MOUNT	✓	✓	✓	✓
WALL MOUNT	✓	✓	✓	✓
RECESSED FLUSH MOUNT	✓	✓	✓	✓
CEILING POLE MOUNT	✓	✓	✓	✓
FREESTANDING	-	-	-	-



CONTROL OPTIONS

ON OFF	✓	✓	✓	✓
DIMMER	✓	✓	✓	✓
MASTER REMOTE *	✓	✓	✓	✓



Measurements displayed within this catalogue are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this catalogue are displayed in mm.

* Control up to six zones of heaters with unlimited heaters per zone from a single control. Works only with dimming controllers. Control operates within 30m of heaters. # Special order in Australia and New Zealand.


PRODUCT MEASUREMENTS




CEILING RECESS

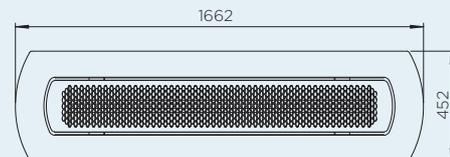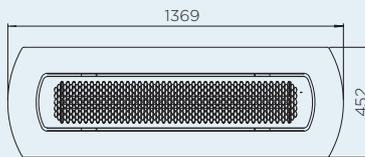

CEILING RECESS




2000W & 4000W

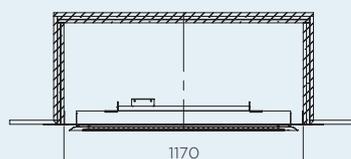

MINIMUM
CEILING CAVITY


3000W & 6000W

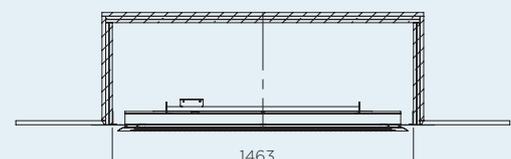

CEILING & WALL MOUNT CLEARANCE


CEILING MOUNT CLEARANCE

2000W & 3000W

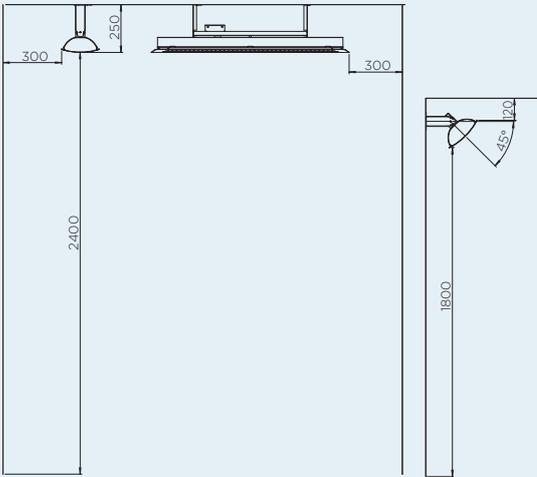


CEILING MOUNT CLEARANCE

4000W & 6000W

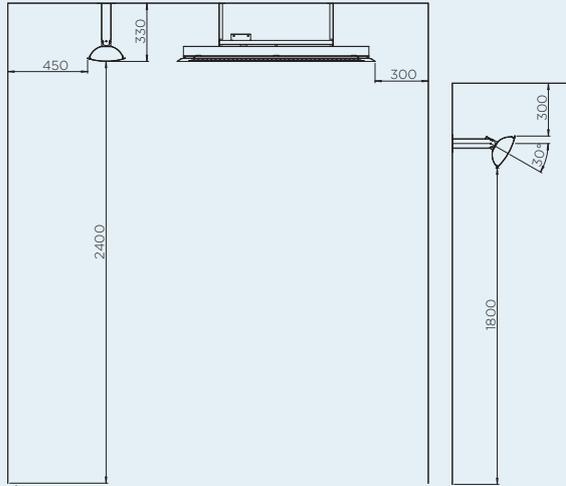


CEILING POLE CLEARANCE


4000W & 6000W

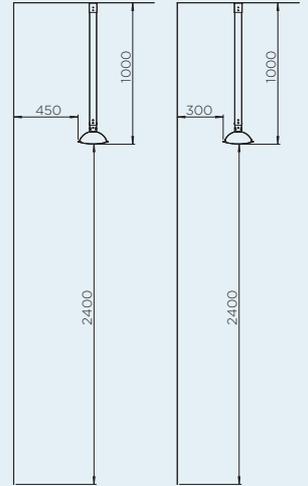

WALL BRACKET (INCLUDED)




2000W & 3000W



4000W & 6000W


HEAT AREA

2000W SERIES

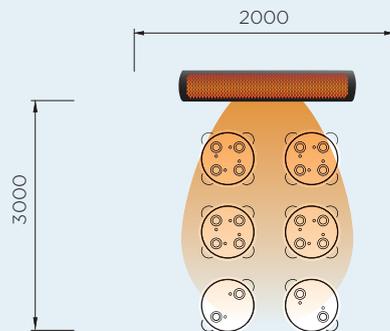


HEATING APPROXIMATELY 6M²
2KW HEATING POWER

3000W SERIES

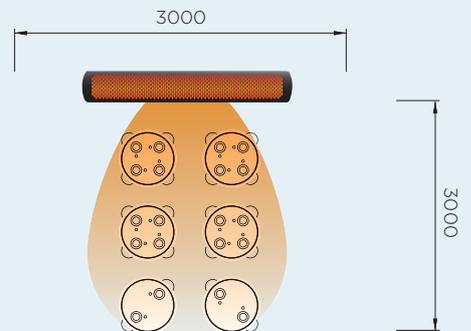


HEATING APPROXIMATELY 9M²
3KW HEATING POWER

4000W SERIES

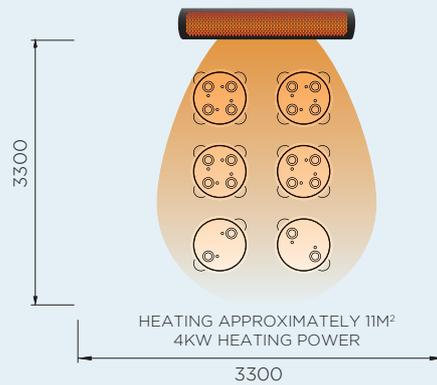

HEATING APPROXIMATELY 11M²
4KW HEATING POWER

6000W SERIES

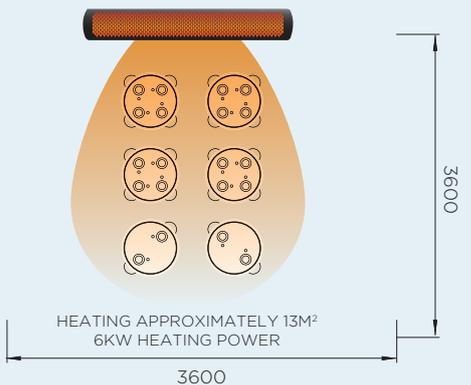

HEATING APPROXIMATELY 13M²
6KW HEATING POWER

TUNGSTEN SMART-HEAT™ PORTABLE

MODEL NUMBER

FUEL TYPE	LPG
COLOUR	BLACK
HEAT AREA	20M ²
HEAT OUTPUT	40MJ
MINIMUM CEILING CLEARANCE	1000MM

MOUNTING OPTIONS


CEILING MOUNT	-
WALL MOUNT	-
RECESSED FLUSH MOUNT	-
CEILING POLE MOUNT	-
FREESTANDING	✓

CONTROL OPTIONS


ON OFF	-
DIMMER	-
MASTER REMOTE	-

Measurements displayed within this catalogue are minimum requirements for installation.
Bromic takes no responsibility for incorrect or non-compliant installations.
All measurement in this catalogue are displayed in mm.


PRODUCT MEASUREMENTS

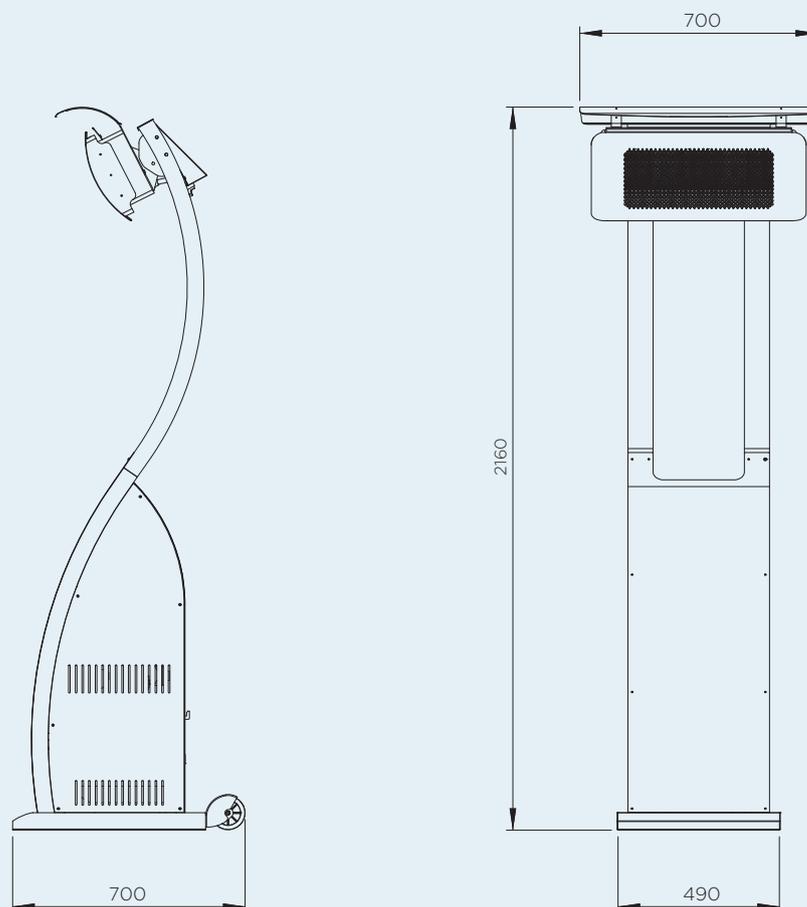

CEILING & WALL CLEARANCE

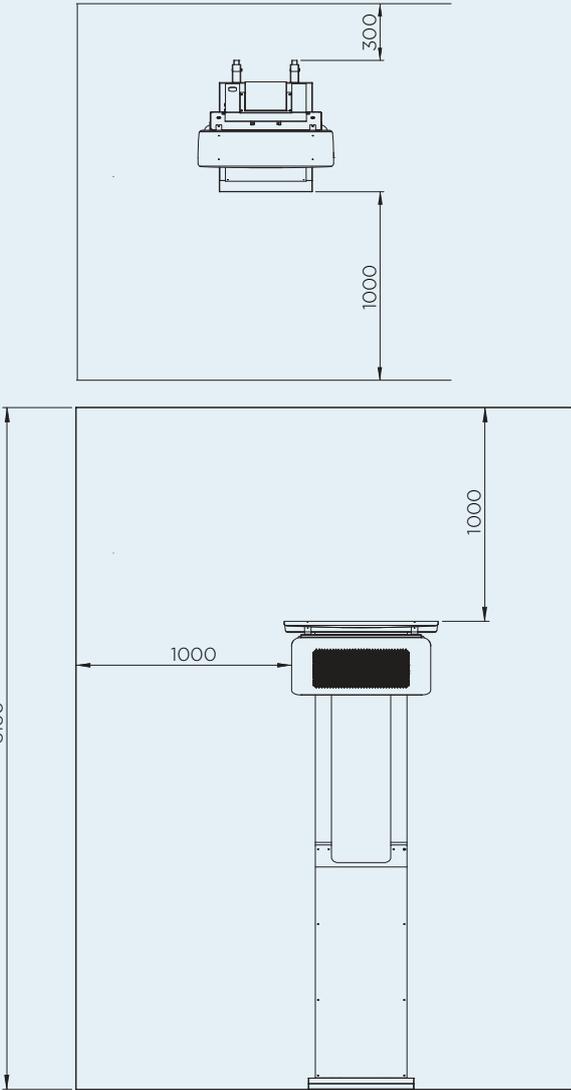

HEAT AREA

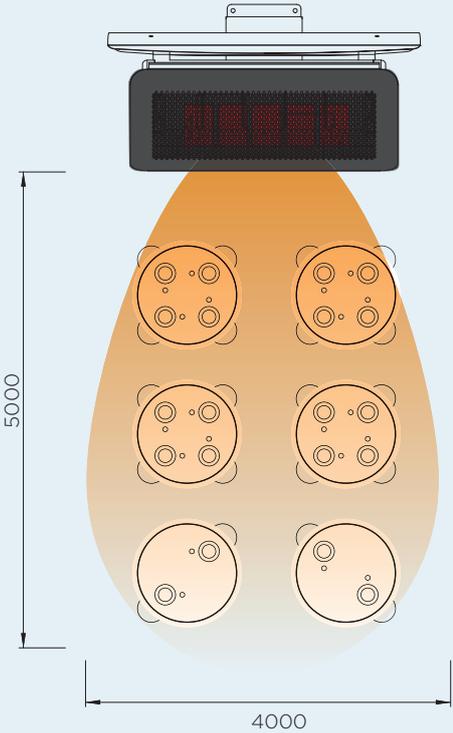

TUNGSTEN PORTABLE
HEATING APPROXIMATELY 20 m²
40MJ HEATING POWER





DESIGN SERVICE

As part of our complimentary service, Bromic Heating Specialists will custom design and tailor a solution to best heat your outdoor living and entertainment spaces.

Learn more about our design service
bromic.com/designservice





ABOUT **BROMIC GROUP**

Bromic's reputation for industry and innovation reaches back to 1978. Initially a supplier of gas components, Bromic has since grown to become an international leader that designs, manufactures and distributes a diverse range of quality, engineered products on a global scale.

CONTACT BROMIC

Asia Pacific

10 Phiney Place
Ingleburn Sydney NSW 2565 AUS
Tel. +61 2 9426 5222

North America

18 Technology Drive | STE 143
Irvine California 92618 USA
Tel. 1800 301 1293

Europe

Hoofdstraat 43 | Business Center De Bank
5481 AA Schijndel | The Netherlands
Tel. +31 7 3704 1029

[BROMIC.COM/HEAT](https://www.bromic.com/HEAT)