

KEY FEATURES


- Flexible Mounting including wall, ceiling and recessed options with minimal clearance requirements
- ► Compact & Elegant Design for seamless integration into design-focused spaces
- **Durable Construction** with a 304 stainless steel body and tinted ceramic-glass face
- Customized Heat Output in increments from 0–100% using the new Affinity Collection of controls
- Marine Grade Available built with 316-grade stainless steel to counteract corrosive coastal environments


COLOR OPTIONS





DIMENSIONS







MOUNTING OPTIONS










Ceiling Mounted Standard Recessed Kit

Low Clearance Recess Kit










SPECIFICATIONS

WATTAGE	HEAT AREA	WEIGHT	RATED CURRENT	MINIMUM FLOOR CLEARANCE	APPROVAL CERTIFICATION	IP RATING	CONTROL OPTIONS
2300W	65ft²	16.5lbs.	220-240V/9.6A 208V/11.1A	WALL 72" CEILING 96"	INTERTEK ETL / cETL 5001799	IP54	Affinity On/Off Affinity Dimmer Manual Wall Switch
3400W	108ft²	22lbs.	220-240V/14.2A 208V/16.3A				
4500W	143ft ²	33lbs.	220-240V/18.8A 208V/21.6A				


^{*} In ideal conditions

CLEARANCES

IINCLUDED MOUNT

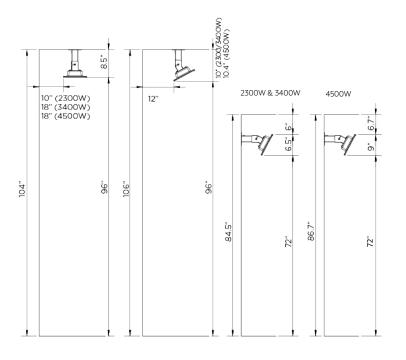

MOUNTING ACCESSORIES



RECESSED

STANDARD RECESS KIT

Refer to Installation Manual. 10" height above heater required. If you don't have 10", use the Low Clearance Recess Kit.

LOW CLEARANCE RECESS KIT

