

PLATINUM SMART-HEAT® ELECTRIC AND MARINE



KEY FEATURES

- ▶ **Flexible Mounting:** including wall, ceiling and recessed options with minimal clearance requirements.
- ▶ **Compact & Elegant Design:** provides seamless integration into design-focused spaces.
- ▶ **Durable Construction:** features a 304 stainless steel body and tinted ceramic-glass face.
- ▶ **Customized Heat Output:** offers increments from 0–100% with Affinity Collection of controls.
- ▶ **Marine Grade Available:** crafted with 316-grade stainless steel to counteract corrosive coastal environments.

COLOR OPTIONS




Black




White

DIMENSIONS

2300W



3400W



4500W



MOUNTING OPTIONS



Wall Mounted



Ceiling Mounted



Standard Recessed Kit



Low Clearance Recess Kit

BROMIC
HEATING


Learn more at bromic.com.au

SPECIFICATIONS

PRODUCT NUMBER BLACK WHITE	WATTAGE	HEAT AREA	WEIGHT	RATED CURRENT	MINIMUM FLOOR CLEARANCE	APPROVAL CERTIFICATION	IP RATING	CONTROL OPTIONS
2620240 2620247	2300W	6m ₂	8kgs.	220-240V/9.6A	WALL 1800mm CEILING 2400mm	SAA-221323-EA	IP54	Affinity On/Off Affinity Dimmer
2620245 2620248	3400W	10m ₂	10kgs.	220-240V/14.2A				
2622000 2622001	4500W	12m ₂	15kgs.	220-240V/18.8A				
MARINE PRODUCT NUMBER BLACK WHITE								
2620251 2620253	2300W	6m ₂	8kgs.	220-240V/9.6A	WALL 1800mm CEILING 2400mm	SAA-221323-EA	IP54	Affinity On/Off Affinity Dimmer Manual Wall Switch
2620252 2620254	3400W	10m ₂	10kgs.	220-240V/14.2A				
2622002 2622003	4500W	12m ₂	15kgs.	220-240V/18.8A				

CLEARANCES

INCLUDED MOUNT

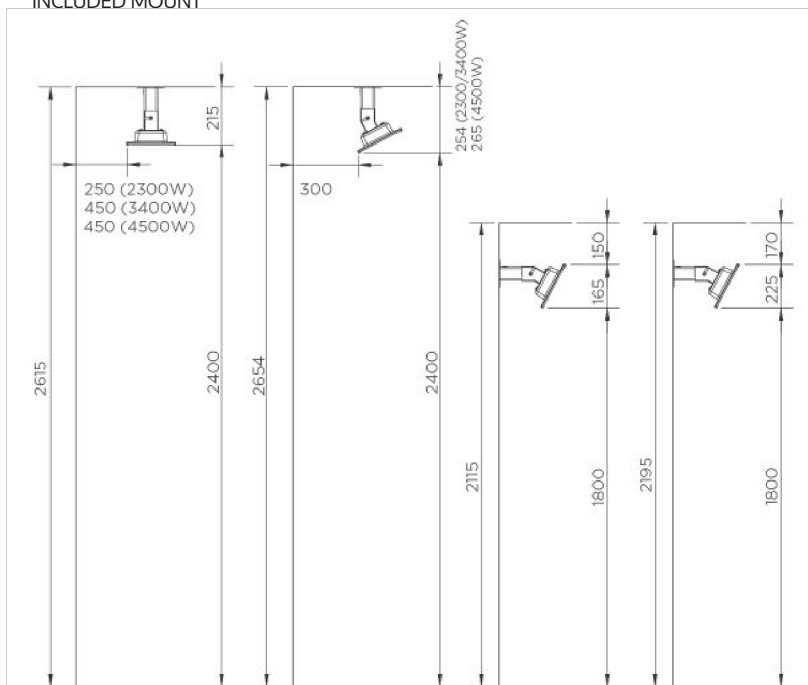

RECESSED



STANDARD RECESS KIT

Refer to Installation Manual. 250mm height above heater required (350mm required for 4500W). If you don't have 254mm (350mm for 4500W), use the Low Clearance Recess Kit.

LOW CLEARANCE RECESS KIT


The Low Clearance Recess Kit is equipped with an integrated cooling fan that requires a dedicated power supply, independent of the heater's electrical connection.

For wiring specifications and installation requirements, refer to the installation manual.

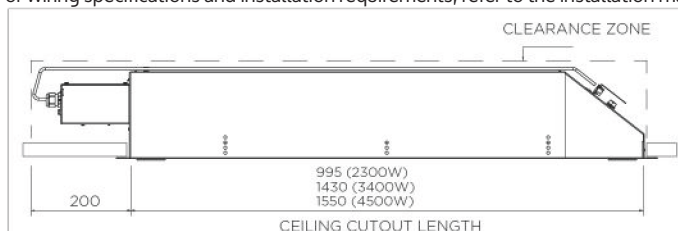

MOUNTING ACCESSORIES

OPTION 1 1200MM SUSPENSION POLE

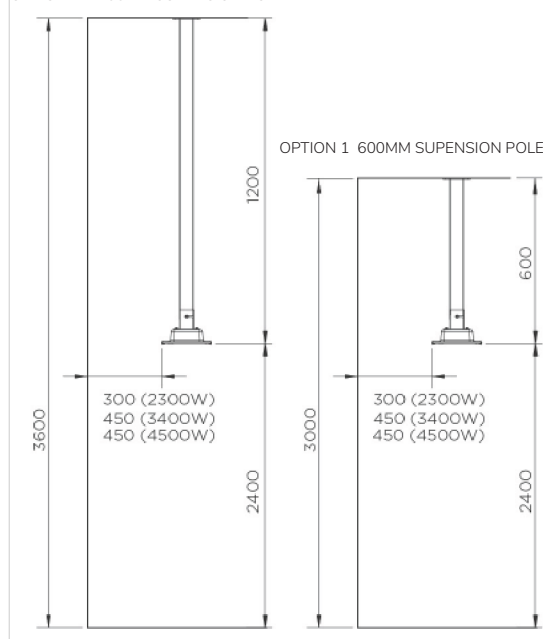

OPTION 1 600MM SUSPENSION POLE

