



PLATINUM SMART-HEAT® GAS



KEY FEATURES

- ▶ **Efficient Heat Distribution:** The signature ceramic-glass screen ensures even heat coverage across large areas, enhancing performance.
- ▶ **High Heating Capacity:** Available in 25 MJ and 42 MJ models, effectively warming outdoor areas up to 20 m².
- ▶ **Durable Construction:** Crafted with premium materials, including a sleek ceramic glass screen and a stainless-steel body, ensuring longevity and reliability.
- ▶ **High Wind Resistance:** Designed to maintain performance in wind speeds up to 20 km/h, ensuring consistent heating in outdoor environments.

MODEL OPTIONS




300




500

DIMENSIONS

FRONT PROFILE (WITH HEAT DEFLECTOR)




300 SERIES



500 SERIES

SIDE PROFILE (WITH HEAT DEFLECTOR)



MOUNTING OPTIONS




Wall Mounted




Ceiling Mounted

FRONT PROFILE (WITHOUT HEAT DEFLECTOR)




300 SERIES



500 SERIES

SIDE PROFILE (WITHOUT HEAT DEFLECTOR)



BROMIC
HEATING

Learn more at bromic.com



SPECIFICATIONS


PRODUCT NUMBER	MODEL	FUEL SOURCE	HEAT AREA	WEIGHT	RATED CURRENT	MINIMUM FLOOR CLEARANCE	APPROVAL CERTIFICATION	IP RATING	CONTROL OPTIONS
2620131-1 2620130-1	300	NG & LPG	12m ²	15kgs	220-240V/2A	2000mm	Global Mark GAS-100177-002	IPX4	Affinity On/Off
2620141-1 2620140-1	500	NG & LPG	20m ²	20kgs	220-240V/2A				

CLEARANCES

INCLUDED MOUNT

MOUNTING ACCESSORIES

(AVAILABLE IN 246mm, 446mm, 646mm, 846mm AND 1046mm)

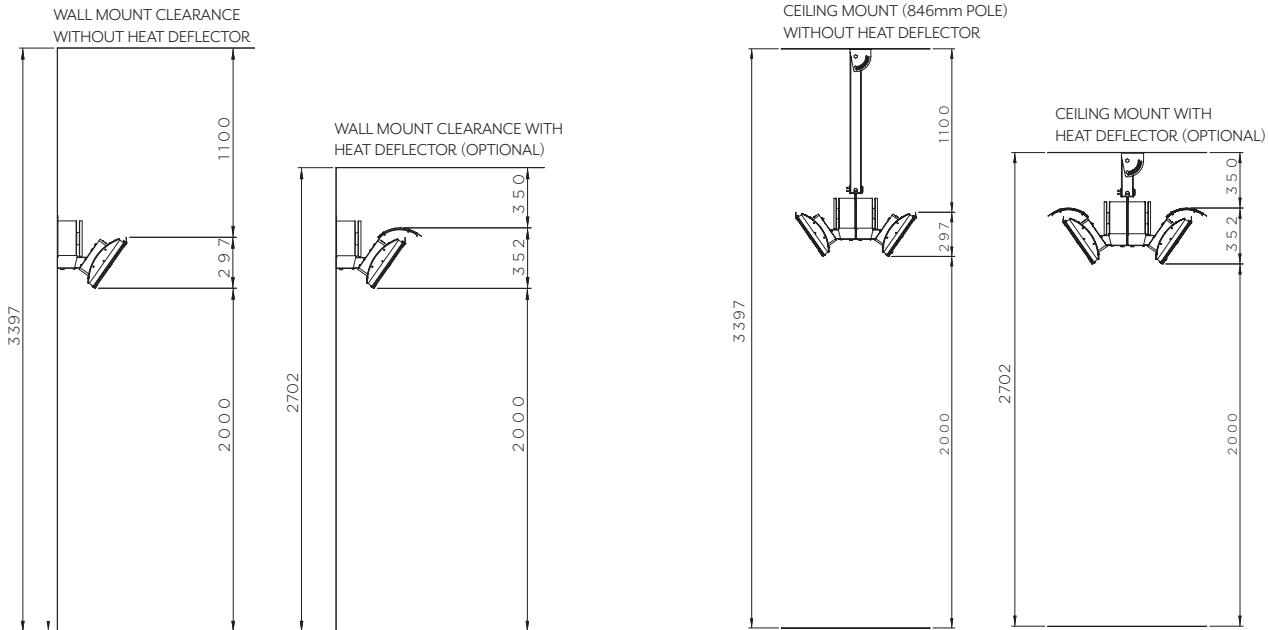

WALL BRACKET (INCLUDED)

