



# PLATINUM SMART-HEAT® GAS



## KEY FEATURES

- ▶ **Efficient Heat Distribution:** The signature ceramic-glass screen ensures even heat coverage across large areas, enhancing performance.
- ▶ **High Heating Capacity:** Available in 23,600 BTU and 39,800 models, effectively warming outdoor areas up to 215 ft<sup>2</sup>.
- ▶ **Durable Construction:** Crafted with premium materials, including a sleek ceramic glass screen and a stainless steel body, ensuring longevity and reliability.
- ▶ **High Wind Resistance:** Designed to maintain performance in wind speeds up to 12 mph, ensuring consistent heating in outdoor environments.

## MODEL OPTIONS



300



500

## DIMENSIONS

FRONT PROFILE (WITH HEAT DEFLECTOR)



SIDE PROFILE (WITH HEAT DEFLECTOR)



## MOUNTING OPTIONS





Wall Mounted




Ceiling Mounted

FRONT PROFILE (WITHOUT HEAT DEFLECTOR)



SIDE PROFILE (WITHOUT HEAT DEFLECTOR)



**BROMIC**<sup>®</sup>  
HEATING

Learn more at [bromic.com](http://bromic.com)



**PLATINUM**  
**SMART-HEAT® GAS**


## SPECIFICATIONS

PRODUCT NUMBER	MODEL	FUEL SOURCE	HEAT AREA	WEIGHT	RATED CURRENT	MINIMUM FLOOR CLEARANCE	APPROVAL CERTIFICATION	IP RATING	CONTROL OPTIONS
BH0110001-1   BH0110002-1	300	NG & LPG	160ft <sup>2</sup>	33lbs.	110V/2A	96"	Intertek 4009079	IPX4	Affinity On/Off Manual Wall Switch
BH0110003-1   BH0110004-1	500	NG & LPG	215ft <sup>2</sup>	44lbs.	110V/2A				


## CLEARANCES

### INCLUDED MOUNT

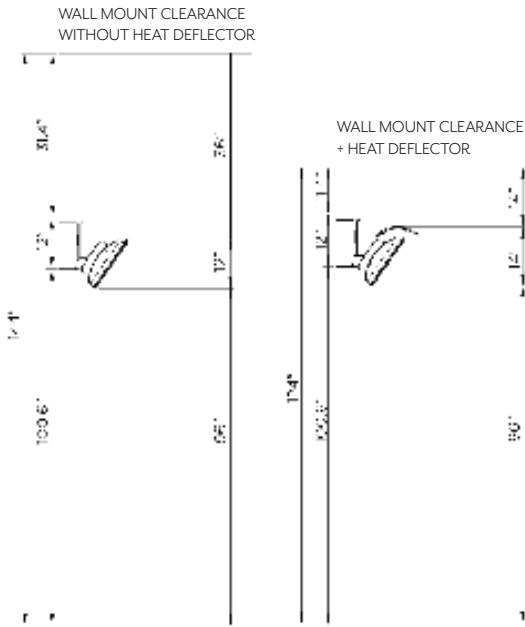


### MOUNTING ACCESSORIES

(AVAILABLE IN 9.69", 13.62", 17.56", 25.43", 33.31" AND 41.18")

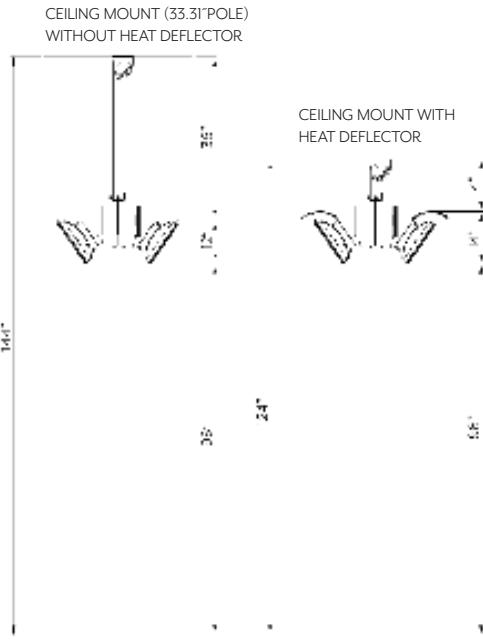

### WALL BRACKET (INCLUDED)



**BROMIC**  
HEATING

Learn more at [bromic.com](http://bromic.com)