

TUNGSTEN SMART-HEAT® GAS



KEY FEATURES

- ▶ **Stylish Industrial Design:** Features a matte black finish with a distinctive honeycomb mesh surface, transforming the traditional style of fixed gas outdoor heaters.
- ▶ **High Heating Capacity:** Available in 26,000 BTU and 43,000 BTU models, effectively warming outdoor areas up to 215 ft².
- ▶ **Durable Construction:** Crafted with premium materials ensuring longevity and reliability.
- ▶ **Pivot Arm Bracket:** Provides greater directional control of the heater making it easy to adjust the flow of heat to where it's needed.

MODEL OPTIONS



300



500

MOUNTING OPTIONS




Wall Mounted




Ceiling Mounted

DIMENSIONS

FRONT PROFILE (WITH HEAT DEFLECTOR)




300




500


SIDE PROFILE (WITH HEAT DEFLECTOR)



FRONT PROFILE (WITHOUT HEAT DEFLECTOR)




300



500

SIDE PROFILE (WITHOUT HEAT DEFLECTOR)



BROMIC[®]
HEATING

Learn more at bromic.com

SPECIFICATIONS

| PRODUCT NUMBER | MODEL | FUEL SOURCE | HEAT AREA | WEIGHT | RATED CURRENT | MINIMUM FLOOR CLEARANCE | APPROVAL CERTIFICATION | IP RATING | CONTROL OPTIONS |
|---------------------------|-------|-------------|--------------------|--------|---------------|-------------------------|------------------------|-----------|------------------------------------|
| BH0210001-1 BH0210002-1 | 300 | NG & LPG | 160ft ² | 33lbs. | 110V/2A | 96" | Intertek 4009079 | IPX4 | Affinity On/Off Manual Wall Switch |
| BH0210003-1 BH0210004-1 | 500 | NG & LPG | 215ft ² | 44lbs. | 110V/2A | | | | |



* In ideal conditions

CLEARANCES

INCLUDED MOUNT

MOUNTING ACCESSORIES

(AVAILABLE IN 9.69", 13.62", 17.56", 25.43", 33.31" AND 41.18")

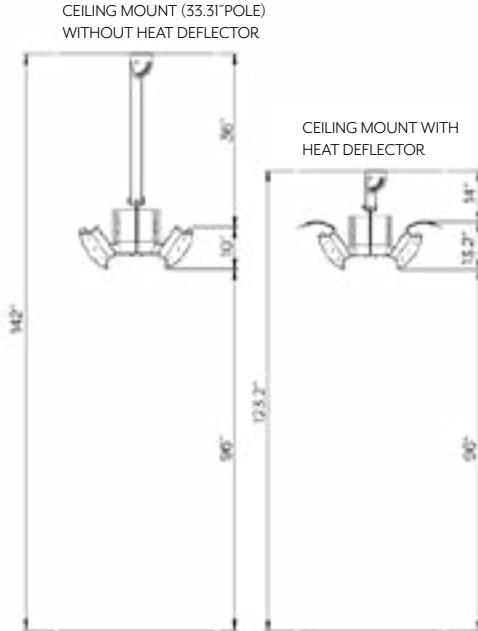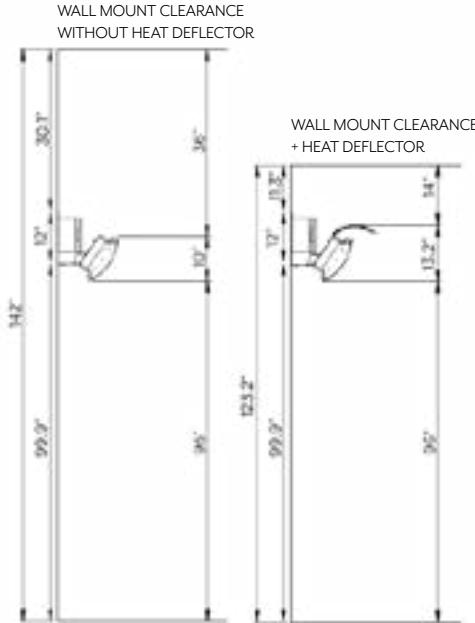

WALL BRACKET

