



TUNGSTEN SMART-HEAT® ELECTRIC

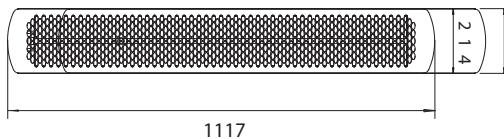


KEY FEATURES

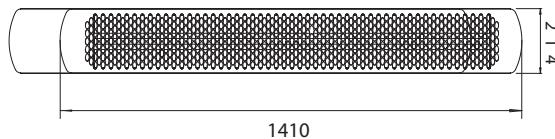
- **Extensive Range of Heat Outputs:** Available in models ranging from 2000W to 6000W.
- **Timeless Design:** Showcases a stylish honeycomb mesh front with a high-temperature, corrosion-resistant coating and durable stainless-steel construction. Available in black and white finishes ensuring suitability for all environments.
- **Versatile Mounting Options:** Supports wall, ceiling and installations, providing versatility to suit various space requirements.
- **Directional Heating:** Adjustable bracket system allows for precise heat direction, ensuring targeted heating for specific seating or lounge areas.

DIMENSIONS


2000/4000W



3000/6000W



MOUNTING OPTIONS



Wall Mounted



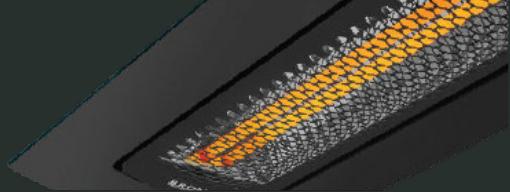
Ceiling Mounted



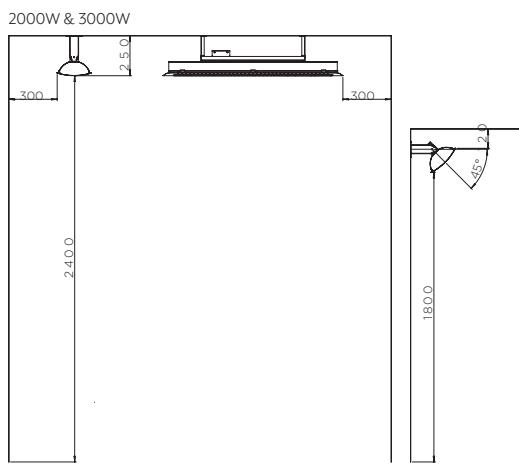
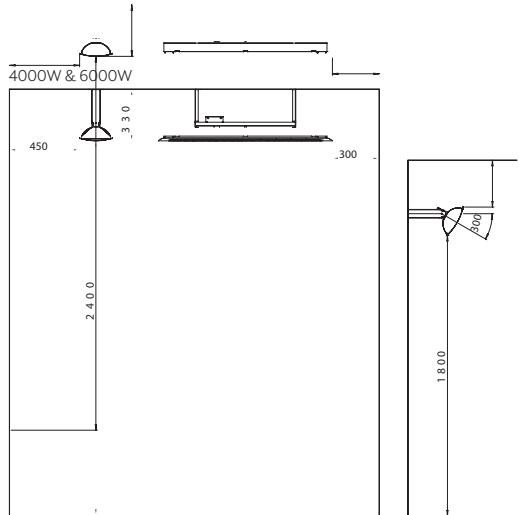
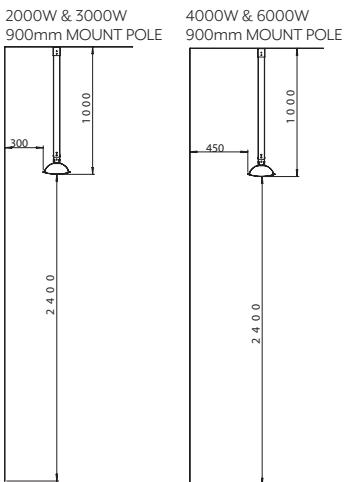
Flush Mounted

BROMIC®
HEATING

Learn more at bromic.com


SPECIFICATIONS

PRODUCT NUMBER	WATTAGE	HEAT AREA	WEIGHT	RATED CURRENT	MINIMUM FLOOR CLEARANCE	APPROVAL CERTIFICATION	IP RATING	CONTROL OPTIONS
2620262-2	2000W	6m ²	9kgs.	220-240V/8.3A	WALL 1800mm CEILING 2400mm	SGSEA/I20315	IPX4	Affinity On/Off Affinity Dimmer
2620263-2	3000W	9m ²	10kgs.	220-240V/12.5A				
2620264-2	4000W	11m ²	9kgs.	220-240V/16.6A				
2620265-2	6000W	13m ²	10kgs.	220-240V/25A				

CLEARANCES
INCLUDED MOUNT

MOUNTING ACCESSORIES

BRACKET (INCLUDED)
