




TUNGSTEN SMART-HEAT® GAS



MODEL OPTIONS



300



500

MOUNTING OPTIONS




Wall Mounted




Ceiling Mounted

DIMENSIONS

FRONT PROFILE (WITH HEAT DEFLECTOR)




300




500


SIDE PROFILE (WITH HEAT DEFLECTOR)



FRONT PROFILE (WITHOUT HEAT DEFLECTOR)




300



500

SIDE PROFILE (WITHOUT HEAT DEFLECTOR)



BROMIC®
HEATING

Learn more at bromic.com

SPECIFICATIONS

PRODUCT NUMBER	MODEL	FUEL SOURCE	HEAT AREA	WEIGHT	RATED CURRENT	MINIMUM FLOOR CLEARANCE	APPROVAL CERTIFICATION	IP RATING	CONTROL OPTIONS
2620331-1 2620330-1	300	NG & LPG	12m ²	15kgs.	220-240V/2A	2500mm	Global Mark GAS-100177-002	IPX4	Affinity On/Off Manual Wall Switch
2620341-1 2620340-1	500	NG & LPG	20m ²	20kgs.	220-240V/2A				


* In ideal conditions

CLEARANCES


INCLUDED MOUNT

MOUNTING ACCESSORIES


(AVAILABLE IN 246mm, 446mm, 646mm, 846mm AND 1046mm)

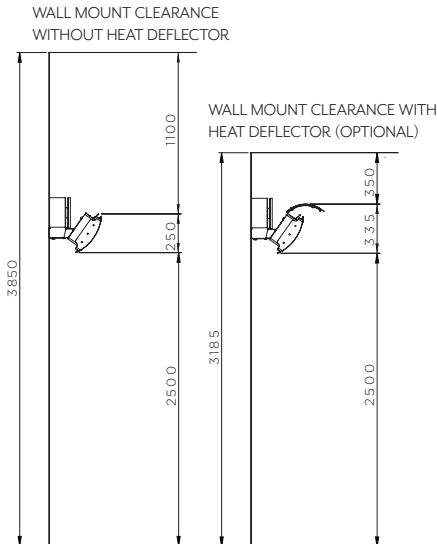

CEILING MOUNT (846mm POLE)
WITHOUT HEAT DEFLECTOR

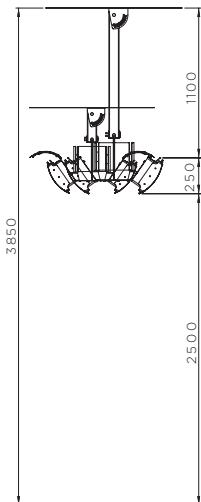

CEILING MOUNT WITH
HEAT DEFLECTOR (OPTIONAL)

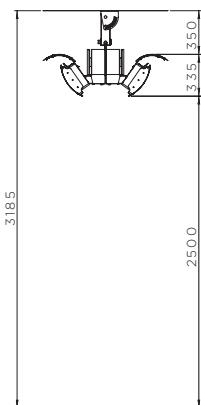

WALL BRACKET

