



# PLATINUM SMART-HEAT® ELECTRIC



## COLOR OPTIONS




Black




White

## DIMENSIONS



2300W

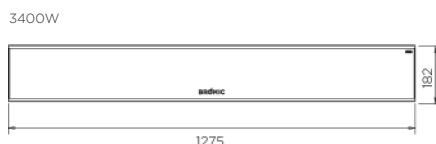

3400W



4500W

## MOUNTING OPTIONS



Wall Mounted



Ceiling Mounted




Standard Recessed Kit



Low Clearance Recess Kit

**BROMIC**<sup>®</sup>  
HEATING

Learn more at [bromic.co.uk](http://bromic.co.uk)

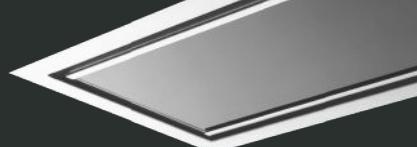


## SPECIFICATIONS

PRODUCT NUMBER BLACK   WHITE	WATTAGE	HEAT AREA	WEIGHT	RATED CURRENT	MINIMUM FLOOR CLEARANCE	APPROVAL CERTIFICATION	IP RATING	CONTROL OPTIONS
BH0320004   BH0320009	2300W	6m <sup>2</sup>	8kgs.	220-240V/9.6A	WALL 1800mm CEILING 2400mm	UKCA-Intertek 2305A0683SHA-V2	IP54	Affinity On/Off Affinity Dimmer Manual Wall Switch
BH0320006   BH0320010	3400W	10m <sup>2</sup>	10kgs.	220-240V/14.2A				
BH3622000   BH3622001	4500W	12m <sup>2</sup>	15kgs.	220-240V/18.8A				


MARINE PRODUCT NUMBER BLACK | WHITE

## CLEARANCES

### INCLUDED MOUNT

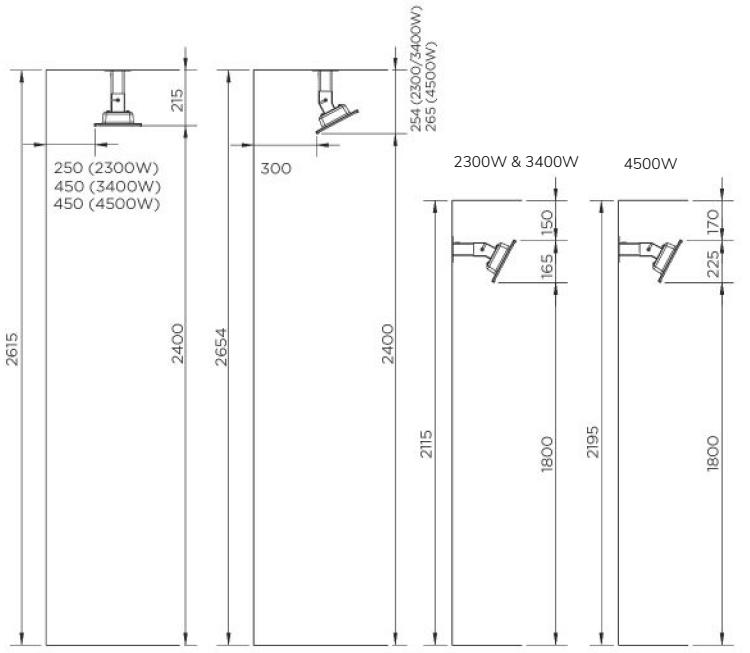

### MOUNTING ACCESSORIES

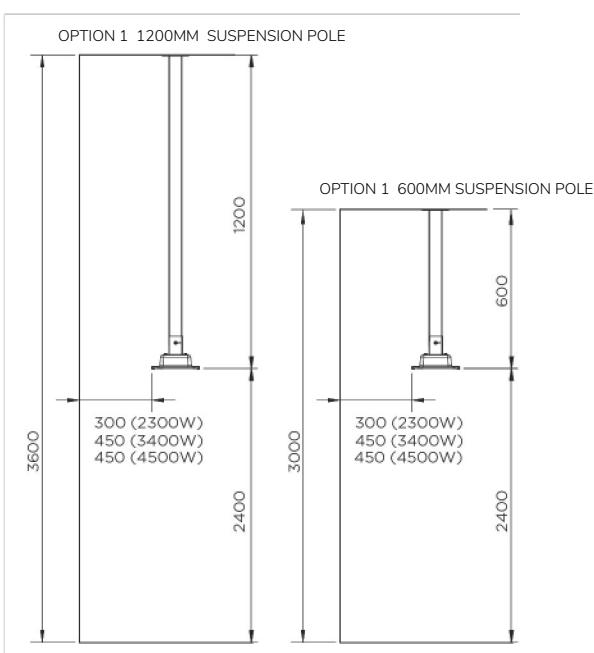

### RECESSED

#### STANDARD RECESS KIT

Refer to Installation Manual. 250mm height above heater required (350mm required for 4500W). If you don't have 254mm (350mm for 4500W), use the Low Clearance Recess Kit.

#### LOW CLEARANCE RECESS KIT

The Low Clearance Recess Kit is equipped with an integrated cooling fan that requires a dedicated power supply, independent of the heater's electrical connection. For wiring specifications and installation requirements, refer to the installation manual.

