

PLATINUM SMART-HEAT® ELECTRIC AND MARINE



KEY FEATURES

- ▶ **Flexible Mounting:** including wall, ceiling and recessed options with minimal clearance requirements.
- ▶ **Compact & Elegant Design:** provides seamless integration into design-focused spaces.
- ▶ **Durable Construction:** with a 304 stainless steel body and tinted ceramic-glass face.
- ▶ **Customized Heat Output:** in increments from 0–100% using the new Affinity Collection of controls.
- ▶ **Marine Grade Available:** crafted with 316-grade stainless steel to counteract corrosive coastal environments.

COLOR OPTIONS




Black




White

DIMENSIONS

2300W



3400W



4500W



MOUNTING OPTIONS



Wall Mounted



Ceiling Mounted



Standard Recessed Kit




Low Clearance Recess Kit

SPECIFICATIONS


PRODUCT NUMBER BLACK WHITE	WATTAGE	HEAT AREA	WEIGHT	RATED CURRENT	MINIMUM FLOOR CLEARANCE	APPROVAL CERTIFICATION	IP RATING	CONTROL OPTIONS
BH0320004 BH0320009	2300W	6m ₂	8kgs.	220-240V/9.6A	WALL 1800mm CEILING 2400mm	UKCA-Intertek 2305A0683SHA-V2	IP54	Affinity On/Off Affinity Dimmer Manual Wall Switch
BH0320006 BH0320010	3400W	10m ₂	10kgs.	220-240V/14.2A				
BH3622000 BH3622001	4500W	12m ₂	15kgs.	220-240V/18.8A				
MARINE PRODUCT NUMBER BLACK WHITE								

CLEARANCES

INCLUDED MOUNT

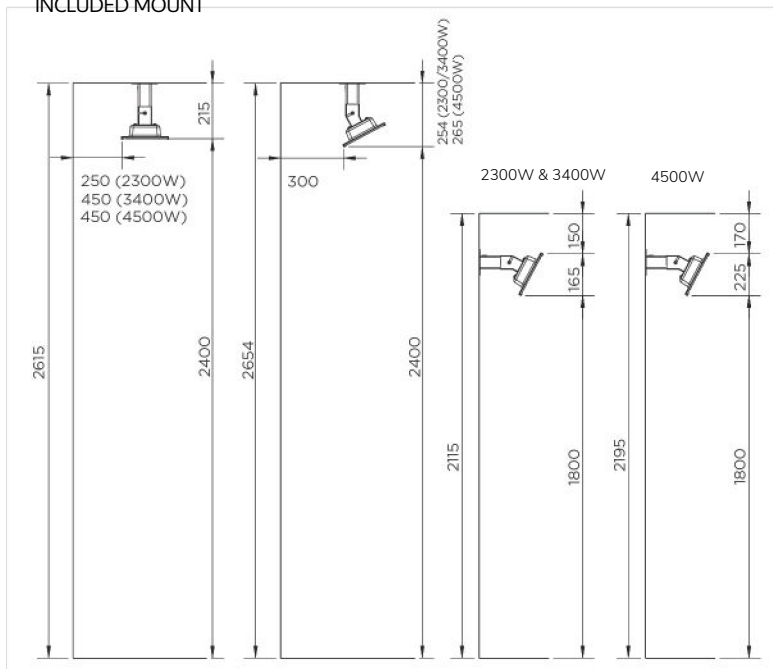

MOUNTING ACCESSORIES

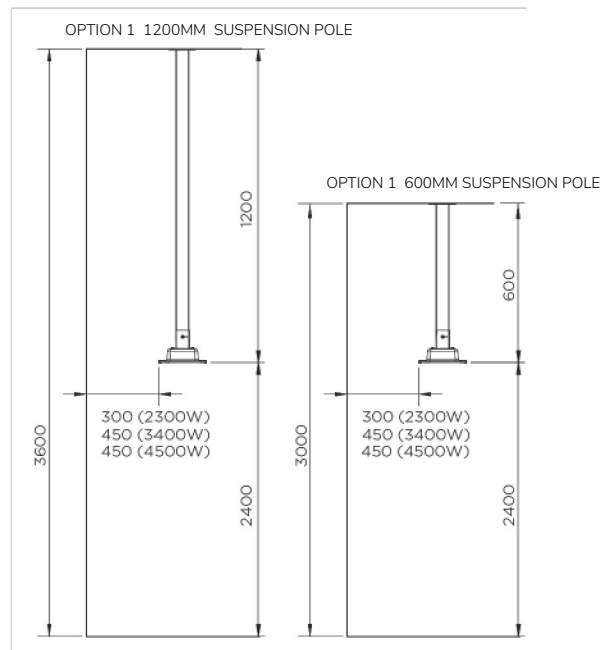

RECESSED

STANDARD RECESS KIT

Refer to Installation Manual. 250mm height above heater required (350mm required for 4500W). If you don't have 254mm (350mm for 4500W), use the Low Clearance Recess Kit.

LOW CLEARANCE RECESS KIT

The Low Clearance Recess Kit is equipped with an integrated cooling fan that requires a dedicated power supply, independent of the heater's electrical connection. For wiring specifications and installation requirements, refer to the installation manual.

