



PLATINUM SMART-HEAT®GAS



KEY FEATURES

- ▶ **Efficient Heat Distribution:** The signature ceramic-glass screen ensures even heat coverage across large areas, enhancing performance.
- ▶ **High Heating Capacity:** Available in 25 MJ and 42 MJ models, effectively warming outdoor areas up to 20 m².
- ▶ **Durable Construction:** Crafted with premium materials, including a sleek ceramic glass screen and a stainless steel body, ensuring longevity and reliability.
- ▶ **High Wind Resistance:** Designed to maintain performance in wind speeds up to 20 km/h, ensuring consistent heating in outdoor environments.

MODEL OPTIONS




300



500

DIMENSIONS

FRONT PROFILE (WITH HEAT DEFLECTOR)




300 SERIES



500 SERIES

SIDE PROFILE (WITH HEAT DEFLECTOR)



MOUNTING OPTIONS




Wall Mounted




Ceiling Mounted

FRONT PROFILE (WITHOUT HEAT DEFLECTOR)




300 SERIES



500 SERIES

SIDE PROFILE (WITHOUT HEAT DEFLECTOR)





SPECIFICATIONS



| PRODUCT NUMBER | MODEL | FUEL SOURCE | HEAT AREA | WEIGHT | RATED CURRENT | MINIMUM FLOOR CLEARANCE | APPROVAL CERTIFICATION | IP RATING | CONTROL OPTIONS |
|----------------|-------|-------------|------------------|--------|---------------|-------------------------|-----------------------------------|-----------|---------------------------------------|
| Various | 300 | NG & LPG | 12m ² | 15kgs | 220-240V/2A | 2000mm | UKCA-Intertek UK-GZH-0359-0000091 | IPX4 | Affinity On/Off Manual Wall Switch |
| Various | 500 | NG & LPG | 20m ² | 20kgs | 220-240V/2A | | | | |

CLEARANCES

INCLUDED MOUNT

MOUNTING ACCESSORIES

(AVAILABLE IN 246mm, 346mm, 446mm, 646mm, 846mm AND 1046mm)

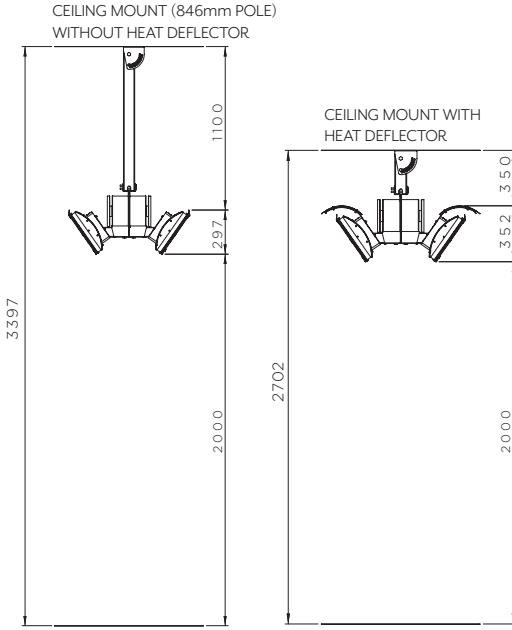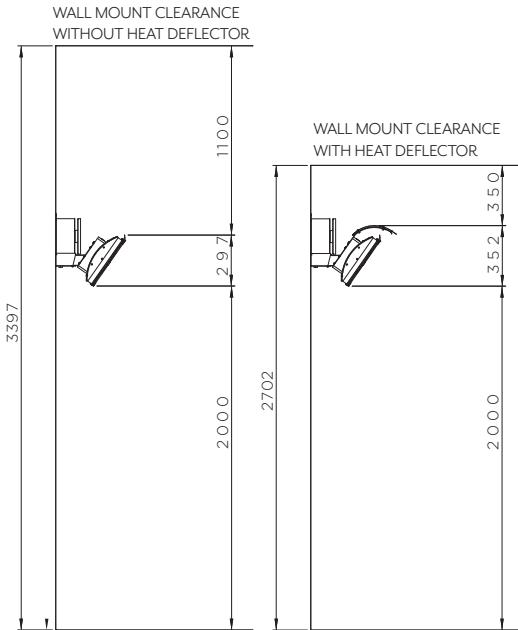

WALL BRACKET (INCLUDED)

