TUNGSTEN SMART-HEAT®GAS

KEY FEATURES

- **Stylish Industrial Design:** Features a matte black finish with a distinctive honeycomb mesh surface, transforming the traditional style of fixed gas outdoor heaters.
- **High Heating Capacity:** Available in 25 MJ and 42 MJ models, effectively warming outdoor areas up to 20 m².
- **Durable Construction:** Crafted with premium materials ensuring longevity and reliability.
- **Pivot Arm Bracket:** Provides greater directional control of the heater making it easy to adjust the flow of heat where it's needed.

MODEL OPTIONS

300



500

MOUNTING OPTIONS

Wall Mounted

Ceiling Mounted

DIMENSIONS

FRONT PROFILE (WITH HEAT DEFLECTOR)

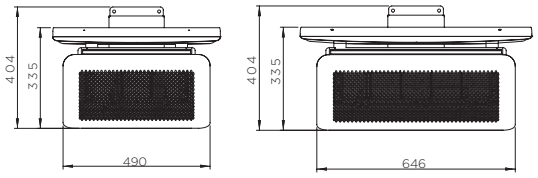

300 500

SIDE PROFILE (WITH HEAT DEFLECTOR)



FRONT PROFILE (WITHOUT HEAT DEFLECTOR)

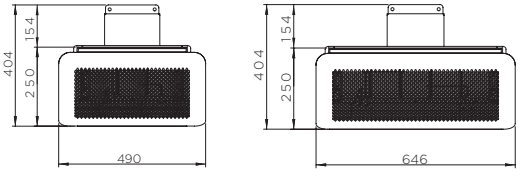

300 500

SIDE PROFILE (WITHOUT HEAT DEFLECTOR)



BROMIC® HEATING

Learn more at **bromic.com**

TUNGSTEN SMART-HEAT® GAS

SPECIFICATIONS

PRODUCT NUMBER	MODEL	HEAT AREA	WEIGHT	RATED CURRENT	MINIMUM FLOOR CLEARANCE	APPROVAL CERTIFICATION	IP RATING	CONTROL OPTIONS
Various	300	12m2	15kgs.	220-240V/2A	2500mm	UKCA-Intertek UK-GZH-0359-0000091	IPX4	Affinity On/Off Manual Wall Switch
Various	500	20m2	20kgs.	220-240V/2A				

* In ideal conditions

CLEARANCES

INCLUDED MOUNT

WALL MOUNT CLEARANCE
WITHOUT HEAT DEFLECTOR

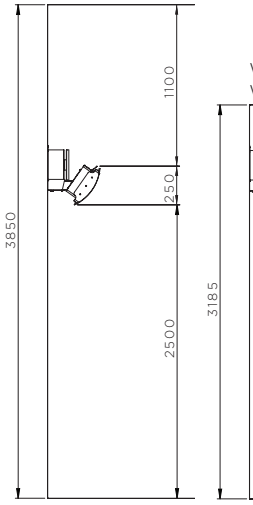

WALL MOUNT CLEARANCE
WITH HEAT DEFLECTOR

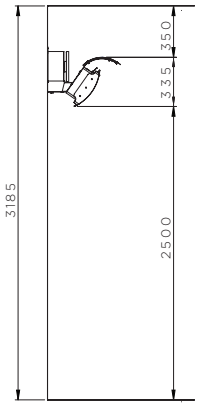

MOUNTING ACCESSORIES
(AVAILABLE IN 246mm, 446mm, 646mm, 846mm AND 1046mm)

CEILING MOUNT (846mm POLE)
WITHOUT HEAT DEFLECTOR

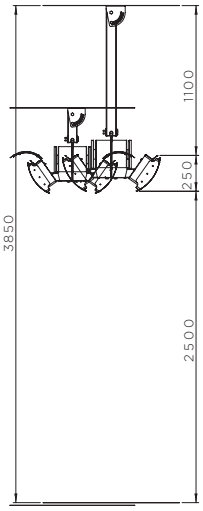

CEILING MOUNT WITH
HEAT DEFLECTOR

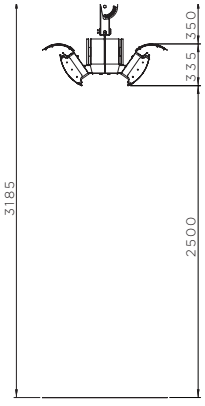

WALL BRACKET