



PRODUCT PORTFOLIO

BROMIC[®]
HEATING

Shaping the Future of Outdoor Heating

As a global leader in premium outdoor heating appliances, we believe outdoor spaces deserve the same thoughtful design and engineering as the interiors they extend. Offering a robust portfolio for both residential and commercial environments, Bromic heating solutions integrate seamlessly into any aesthetic, **extending memorable outdoor moments from season to season.**



Product Portfolio

Our best-in-class product portfolio gives architects, designers, and homeowners unmatched flexibility to create inspired spaces. Whether classic or contemporary, our built-in and freestanding solutions are designed to complement architectural intent, bringing performance-driven comfort to every outdoor setting.



Eclipse
Contemporary Design with Illuminating Elegance



Platinum
Seamless Integration with Effortless Harmony



Tungsten
Distinctive Form with Powerful Impact



Cobalt
Industrial Character with Architectural Edge



Crafting Moments with Radiant Warmth

Our patented Smart-Heat™ radiant heat technology surrounds outdoor spaces with warmth that feels as natural as sunlight. Engineered for effortless integration within any environment, Bromic infrared heating systems minimize energy use while delivering powerful, efficient heat precisely where it's needed most.



Intelligent Design for Meaningful Connections

Achieve precise control of your outdoor heating experience. Affinity Controls offer 1% incremental adjustments and compatibility with Amazon Alexa, Google Home, and most home or building automation systems. Easily program timers and zones to maintain the ideal temperature and atmosphere in any outdoor setting.



Eclipse Smart-Heat® Collection

The Eclipse built-in and freestanding collection seamlessly blends sculptural elegance with functionality, combining 2900W of radiant heat and dimmable LED ambient light. Its standout features include a sleek circular design and ceramic-glass face to bring a modern, luxurious touch to any space.

Dual Functionality

Combines efficient radiant heating with dimmable LED lighting rail, allowing seamless transition from afternoon to evening.

Contemporary Design

Features a luxurious pendant design with a contemporary matte-black finish and ceramic-glass screen.


Flexible Mounting Options

The Eclipse Collection offers a range of mounting options, including straight and curved pole designs, wall mounting, and a freestanding solution—designed to suit diverse outdoor settings.


Adjustable Heat & Light Settings

Offers three different heat levels (33%, 66%, 100%) and incremental light outputs, providing customizable warmth and ambiance.

Technical Specs



Installation Height
8–10 ft




Max Output/Current
2900 W



Voltage
208-240 V
1.14–12.1Amps



IP Rating
IP54



Max Heat Area
121 ft²



Lumens
216.6

Electric Series



Eclipse 24 Inch Twin Ceiling Pole
BH3230002

Model	Model #	Voltage	Max Heat Area	Approval Certification
Eclipse Electric 2900W	BH0920001-2	220-240V	121ft ²	SGS / NA SGw074
	BH0920003	208V		

Additional Mounting Options



Eclipse 8 Inch Straight Pole
BH3230001



Eclipse 24 Inch Straight Pole
BH3230002



Eclipse 24 Inch Curved Pole
BH3230004



Eclipse 48 Inch Straight Pole
BH3230005



Eclipse Wall Mount Pole
BH3230006

Freestanding Series



Model	Model #	Voltage	Max Heat Area	Approval Certification
Eclipse Freestanding 2900W	BH0820001-2	220-240V	121ft ²	SGS / NA SGSNA/21/GZ/00074





Platinum Smart-Heat® Collection

The Platinum Collection, available in Electric, Marine, and Gas models, is crafted in premium stainless steel with a sleek ceramic-glass face—bringing refined design and unmatched performance to environments ranging from private patios and coastal residences to luxury vessels.

Flexible Mounting

Choose from wall, ceiling, or recessed (electric only) installations with minimal clearance requirements, offering low-clearance accessibility ideal for flush mounting.

Durable Construction

Built with 304 stainless steel for standard models and 316 marine-grade stainless steel for the Marine Series, complemented by a ceramic-glass face. *The Marine Series is offered exclusively in electric models.*

Compact & Elegant

Engineered to complement and blend effortlessly into thoughtfully designed environments.

Even Heat Distribution


The signature ceramic-glass face provides balanced warmth across large areas and sets the stage for endless entertaining.

Approval Certification


Electric Models: Intertek ETL / cETL 5001799

Gas Models: Intertek 4009079

Technical Specs




Installation Height
8–10 ft




Max Output
Electric 4500 W
Gas 39,800 BTU



Voltage
Electric 208-240 V
Gas 110V



IP Rating
Gas - IPX4
Electric - IP54
Marine - IP55



Max Heat Area
Electric 143 ft²
Gas 215 ft²



Electric Series

Model	Color	Model #	Voltage	Max Heat Area	Approval Certification
Platinum Electric 2300W	Black White	BH0320019 BH0320020	208V	65ft ²	Intertek ETL / cETL 5001799
		BH0320003 BH0320007	220-240V		
Platinum Electric 3400W	Black White	BH0320022 BH0320021	208V	108ft ²	
		BH0320005 BH0320008	220-240V		
Platinum Electric 4500W	Black White	BH3622005 BH3622004	208V	143ft ²	
		BH3622000 BH3622001	220-240V		
Model	Color	Model #	Voltage	Max Heat Area	Approval Certification
Platinum Electric Marine 2300W	Black White	BH0320023 BH0320024	208V	65ft ²	Intertek ETL / cETL 5001799
		BH0320015 BH0320017	220-240V		
Platinum Electric Marine 3400W	Black White	BH0320025 BH0320026	208V	108ft ²	
		BH0320016 BH0320018	220-240V		
Platinum Electric Marine 4500W	Black White	BH3622006 BH3622007	208V	143ft ²	
		BH3622002 BH3622003	220-240V		



Heaters shown with optional Heat Deflector, sold separately.

Gas Series

Model	Model #	Output	Voltage	Fuel Type	Max Heat Area	Approval Certification
Platinum Gas 300	BH0110001-1	26,000 BTU	110V	NG	160ft ²	Intertek 4009079
Platinum Gas 300	BH0110002-1	26,000 BTU		LPG		
Platinum Gas 500	BH0110003-1	39,800 BTU		NG	215ft ²	
Platinum Gas 500	BH0110004-1	39,800 BTU		LPG		





Tungsten Smart-Heat® Collection

Available in electric, gas, built-in and freestanding models, the Tungsten Collection pairs lasting performance with timeless style. Crafted from durable 304-grade stainless steel and finished with a signature honeycomb mesh face, the design blends enduring strength with contemporary elegance for any outdoor setting.

Extensive Range of Heat Outputs

Electric models range from 2000W to 6000W, and gas models range from 23,600 to 39,800 BTU, offering the ideal level of warmth for any space.

Timeless Design

Defined by a striking honeycomb mesh front, high-temperature corrosion-resistant coating, and robust stainless steel construction.


Versatile Mounting Options

Supports wall, ceiling, and recessed (electric only) mounting, with freestanding configurations available, offering flexibility across a variety of layouts.

Directional Heating


An adjustable bracket system allows precise heat placement, optimizing warmth for seating, dining, or lounge areas.

Technical Specs




Installation Height

8–10 ft



Max Output

Electric 6000W
Gas 43,000 BTU




Voltage

Electric 208-277V
Gas 110V





IP Rating

IPX4



Max Heat Area

Electric 160 ft²
Gas 215 ft²



Electric Series

Model	Color	Model #	Voltage	Max Heat Area	Approval Certification
Tungsten Electric 2000W	Black	BH0420030	220-240V	65ft ²	Intertek ETL / cETL 4005951
Tungsten Electric 3000W	Black	BH0420031	220-240V	100ft ²	
Tungsten Electric 4000W	Black White	BH0420034 BH0420037	208V	130ft ²	
		BH0420032 BH0420012	220-240V		
		BH0420042 BH0420044	277V		
Tungsten Electric 6000W	Black White	BH0420035 BH0420036	208V	160ft ²	
		BH0420033 BH0420013	220-240V		
		BH0420043 BH0420045	277V		

Freestanding Series

Model	Model #	Fuel Type	Max Heat Area	Approval Certification
Tungsten Gas	BH0510005	NG	215ft ²	Intertek 4009079
Tungsten Gas	BH0510001	LPG		



Gas Series



Product shown with heat deflector accessory installed, sold separately.

Technical Specs

Model	Model #	Output	Voltage	Fuel Type	Max Heat Area	Approval Certification
Tungsten Gas 300	BH0210001-1	26,000 BTU	110V	NG	160ft ²	Intertek 4009079
Tungsten Gas 300	BH0210002-1	26,000 BTU		LPG		
Tungsten Gas 500	BH0210003-1	43,000 BTU		NG	215ft ²	
Tungsten Gas 500	BH0210004-1	43,000 BTU		LPG		





Cobalt Smart-Heat™ Collection

The Cobalt Collection combines industrial-inspired design with durable 304-grade stainless steel. It delivers the trusted performance and impressive radiant warmth that homeowners and designers rely on.

Flexible Heat Control

Engineered with high-quality quartz heating elements providing efficient radiant warmth across outdoor spaces up to 160 ft² (model dependent)

Industrial Design

Experience powerful performance available in two refined design models—4000W (4kW) and 6000W (6kW).


Directional Heating

Provides flexible, directional heating with easy wall or ceiling bracket adjustments for precise heat coverage.


Ancillary Usage

Designed to deliver impactful, reliable heat across large areas such as garages, barns, and warehouses.

Technical Specs



Installation Height
8–10 ft




Max Output
6000W



Voltage
208-240V




IP Rating
IPX4



Max Heat Area
160 ft²

Electric Series

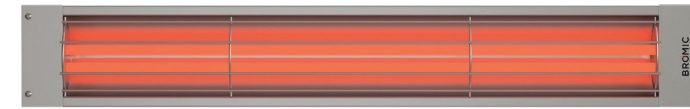


Model	Color	Model #	Voltage	Max Heat Area	Approval Certification
Cobalt Electric 4000W	Stainless Steel	BH610007	208V	130ft ²	Intertek ETL / cETL 4005951
		BH610003	220-240V		
Cobalt Electric 6000W	Stainless Steel	BH610008	208V	160ft ²	
		BH610004	220-240V		

Manual Wall Switches

Compatible with Bromic gas and electric heating systems.

Indoor Series

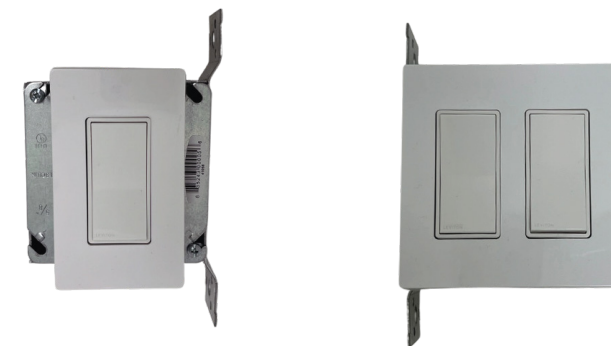

Outdoor Series



Model	Switch Color	Wall Plate Color	Max Voltage	Amperage	Model #
Indoor Manual Wall Switch – Single	White	White	Up to 277V	20A	BH3130071
Indoor Manual Wall Switch – Double	White	White	Up to 277V	20A	BH3130072

Model	Switch Color	Wall Plate Color	Max Voltage	Amperage	Model #
Outdoor Manual Wall Switch – Single	White	Grey	Up to 277V	20A	BH3130081
Outdoor Manual Wall Switch – Double	White	Grey	Up to 277V	20A	BH3130082



Affinity Collection

With Wi-Fi and Bluetooth connectivity, Affinity Controls work seamlessly with the Bromic Heating app, Google Home, Amazon Alexa, and leading home automation systems, including Lutron, Crestron, Control4, Domotica, and Josh.ai.* Adjust settings from anywhere, create personalized zones, and manage multiple locations or users with unmatched ease.

Various Models Available

Includes options for 1, 2, and 5 channel models with each channel controlling up to 6000W of power or 10 gas heaters.

Wi-Fi & Bluetooth Connectivity

Using the enabled Wi-Fi (compatible with 2.4GHz) or Bluetooth connectivity, control your comfort via the Bromic Heating app.


Home & Business Automation System Access

With the Expansion Board accessory installed, connect to leading smart automation systems from major brands including Lutron, Crestron, Control4 and more.

Advanced Features

Features include multi-user management, ability in addition to setting timers and schedules, creating heating zones, and managing multiple sites.

Key Features



Group by Zones



Timers & Scheduling



Voice Control



Home Automation Integration



Multi-User Management

* Affinity Controls can be integrated with both Home and Business automation systems with the addition of the Smart-Heat Expansion Board using 0-10v control. The expansion board is built into the 5-Channel controllers.

On/Off Series



Affinity On/Off Controller 1 & 2 Channel
Affinity Eclipse Controller 1 Channel



Affinity On/Off Controller 5 Channel

Dimmer Series



Affinity Dimmer Controller 1 Channel



Affinity Dimmer Controller 2 Channel



Affinity Dimmer Controller 5 Channel Affinity Eclipse Electric Controller 5 Channel

Model	Channels	Model #	Voltage	Max Wattage	Compatible Heaters
Affinity On/Off Controller	1	BH3130051	110V-277V	Up to 6000W or 10 Gas Heaters	All Bromic heaters except Eclipse
	2	BH3130052	110V-277V	Up to 12000W or 20 Gas Heaters	All Bromic heaters except Eclipse
	5	BH3130053	110V-277V 3 Phase	Up to 30000W or 50 Gas Heaters	
Affinity Dimmer Controller	1	BH3130061	208V-277V	Up to 6000W	All Bromic heaters except Eclipse
	2	BH3130062	208V-277V	Up to 12000W	
	5	BH3130063	208V-277V 3 Phase	Up to 30000W	
Affinity Eclipse Pendant Controller	1	BH8380051	208-240V	4000W	Eclipse Electric
	5	BH8380055	208-240V 3 Phase	6000W (30A Max)	

Sold Separately

Mounts & Accessories

Electric Series

Platinum Electric & Marine Accessories



Platinum Electric Low Clearance Recess Kit



Platinum Electric Standard Recess Kit



Platinum Electric 4' Mounting Pole

Tungsten Electric Accessories



Tungsten Electric Recess Kit



Tungsten Electric 3' Mounting Pole

Model	Description	Model #
Platinum Electric	Low Clearance Recess Kit (2300W 3400W 4500W)	BH3623009 BH3623008 BH3623012
	Standard Recess Kit (2300W 3400W 4500W)	BH3130017 BH3130027 BH3623000
	2' Mounting Pole (2300W & 3400W 4500W)	BH3130023-1 BH3623020
	4' Mounting Pole (2300W & 3400W 4500W)	BH3130024-1 BH3623021
Platinum Electric Marine	Low Clearance Recess Kit (2300W 3400W 4500W)	BH3623011 BH3623010 BH3623013
	Standard Recess Kit (2300W 3400W 4500W)	BH3130034 BH3130035 BH3623001
	2' Mounting Pole (2300W & 3400W 4500W)	BH3130046 BH3623022
	4' Mounting Pole (2300W & 3400W 4500W)	BH3130047 BH3623023
Tungsten Electric	Standard Recess Kit Black (2000W & 4000W 3000W & 6000W)	BH8180010 BH8180011
	Standard Recess Kit White (2000W & 4000W 3000W & 6000W)	BH8180096 BH8180095
	3' Mounting Pole Black	BH8180012
	3' Mounting Pole White	BH3130006
Eclipse Electric	8" Straight Pole	BH3230001
	24" Straight Pole	BH3230002
	24" Twin Pole (Included)	BH3230003
	24" Curved Pole	BH3230004
	48" Straight Pole	BH3230005
	Wall Mount Pole	BH3230006



Gas Series



Model	Description	Model #
Platinum & Tungsten Gas	9.69" Mounting Bracket	BH3030003
	13.62" Mounting Bracket	BH3030004
	17.56" Mounting Bracket	BH3030005
	25.43" Mounting Bracket	BH3030006
	33.31" Mounting Bracket	BH3030007
	41.18" Mounting Bracket	BH3030008
	Platinum 300 Series Heat Deflector	BH3030001-1
	Platinum 500 Series Heat Deflector	BH3030002-1
	Tungsten 300 Series Heat Deflector	BH3030011
	Tungsten 500 Series Heat Deflector	BH3030012

Controls

*Included in all 5 Channel Affinity Models

Model	Model #
0-10V/Ethernet Expansion Board*	BH3130070



0-10V/Ethernet Expansion Board



QR Concierge

Scan for Bromic Resources & Care

From warranty registration to customer care, our QR Concierge gives you instant access to our trusted support network. Scan to find guides, request service, or get product tips. We're here to ensure your Bromic experience is seamless, because premium performance deserves unparalleled support.

Talk to an Expert

At Bromic Heating we pride ourselves not just on our products but also on our sales, technical and customer support services.



Warranty

Easily access warranty information, and enjoy peace of mind knowing that our support team is here to assist you throughout the warranty period.



Complimentary Design Service

Take the guesswork out of planning your outdoor heating. From maximizing heat coverage to delivering a complete heating system recommendation, our team guides you every step of the way. We provide tailored support to optimize your layout and environment, align solutions with your project budget, and ensure all installation requirements are covered—at no cost to you.



Technical Documents

Need help with installation or troubleshooting? Instant access to Bromic technical resources, including guides and expert support.ensuring your products perform at their best.





BROMIC[®]
HEATING