


A man with a beard and glasses, wearing a blue sweater, is shown from the side, holding a smartphone. He is looking at the screen, which displays a control interface for the BROMIC Affinity Smart-Heat system. The background is a modern outdoor space with a grey concrete wall, two rectangular recessed light fixtures, and a black metal table with wire chairs. A green bottle and some glasses are on the table.

BROMIC AFFINITY SMART-HEAT[®] CONTROL SYSTEM

BROMIC[®]
HEATING


The Affinity Smart-Heat® Control System brings together a control box and the Bromic Heating app to deliver seamless control of outdoor heating. Create heating zones, adjust output, automate schedules, and manage multiple heaters from one connected platform.

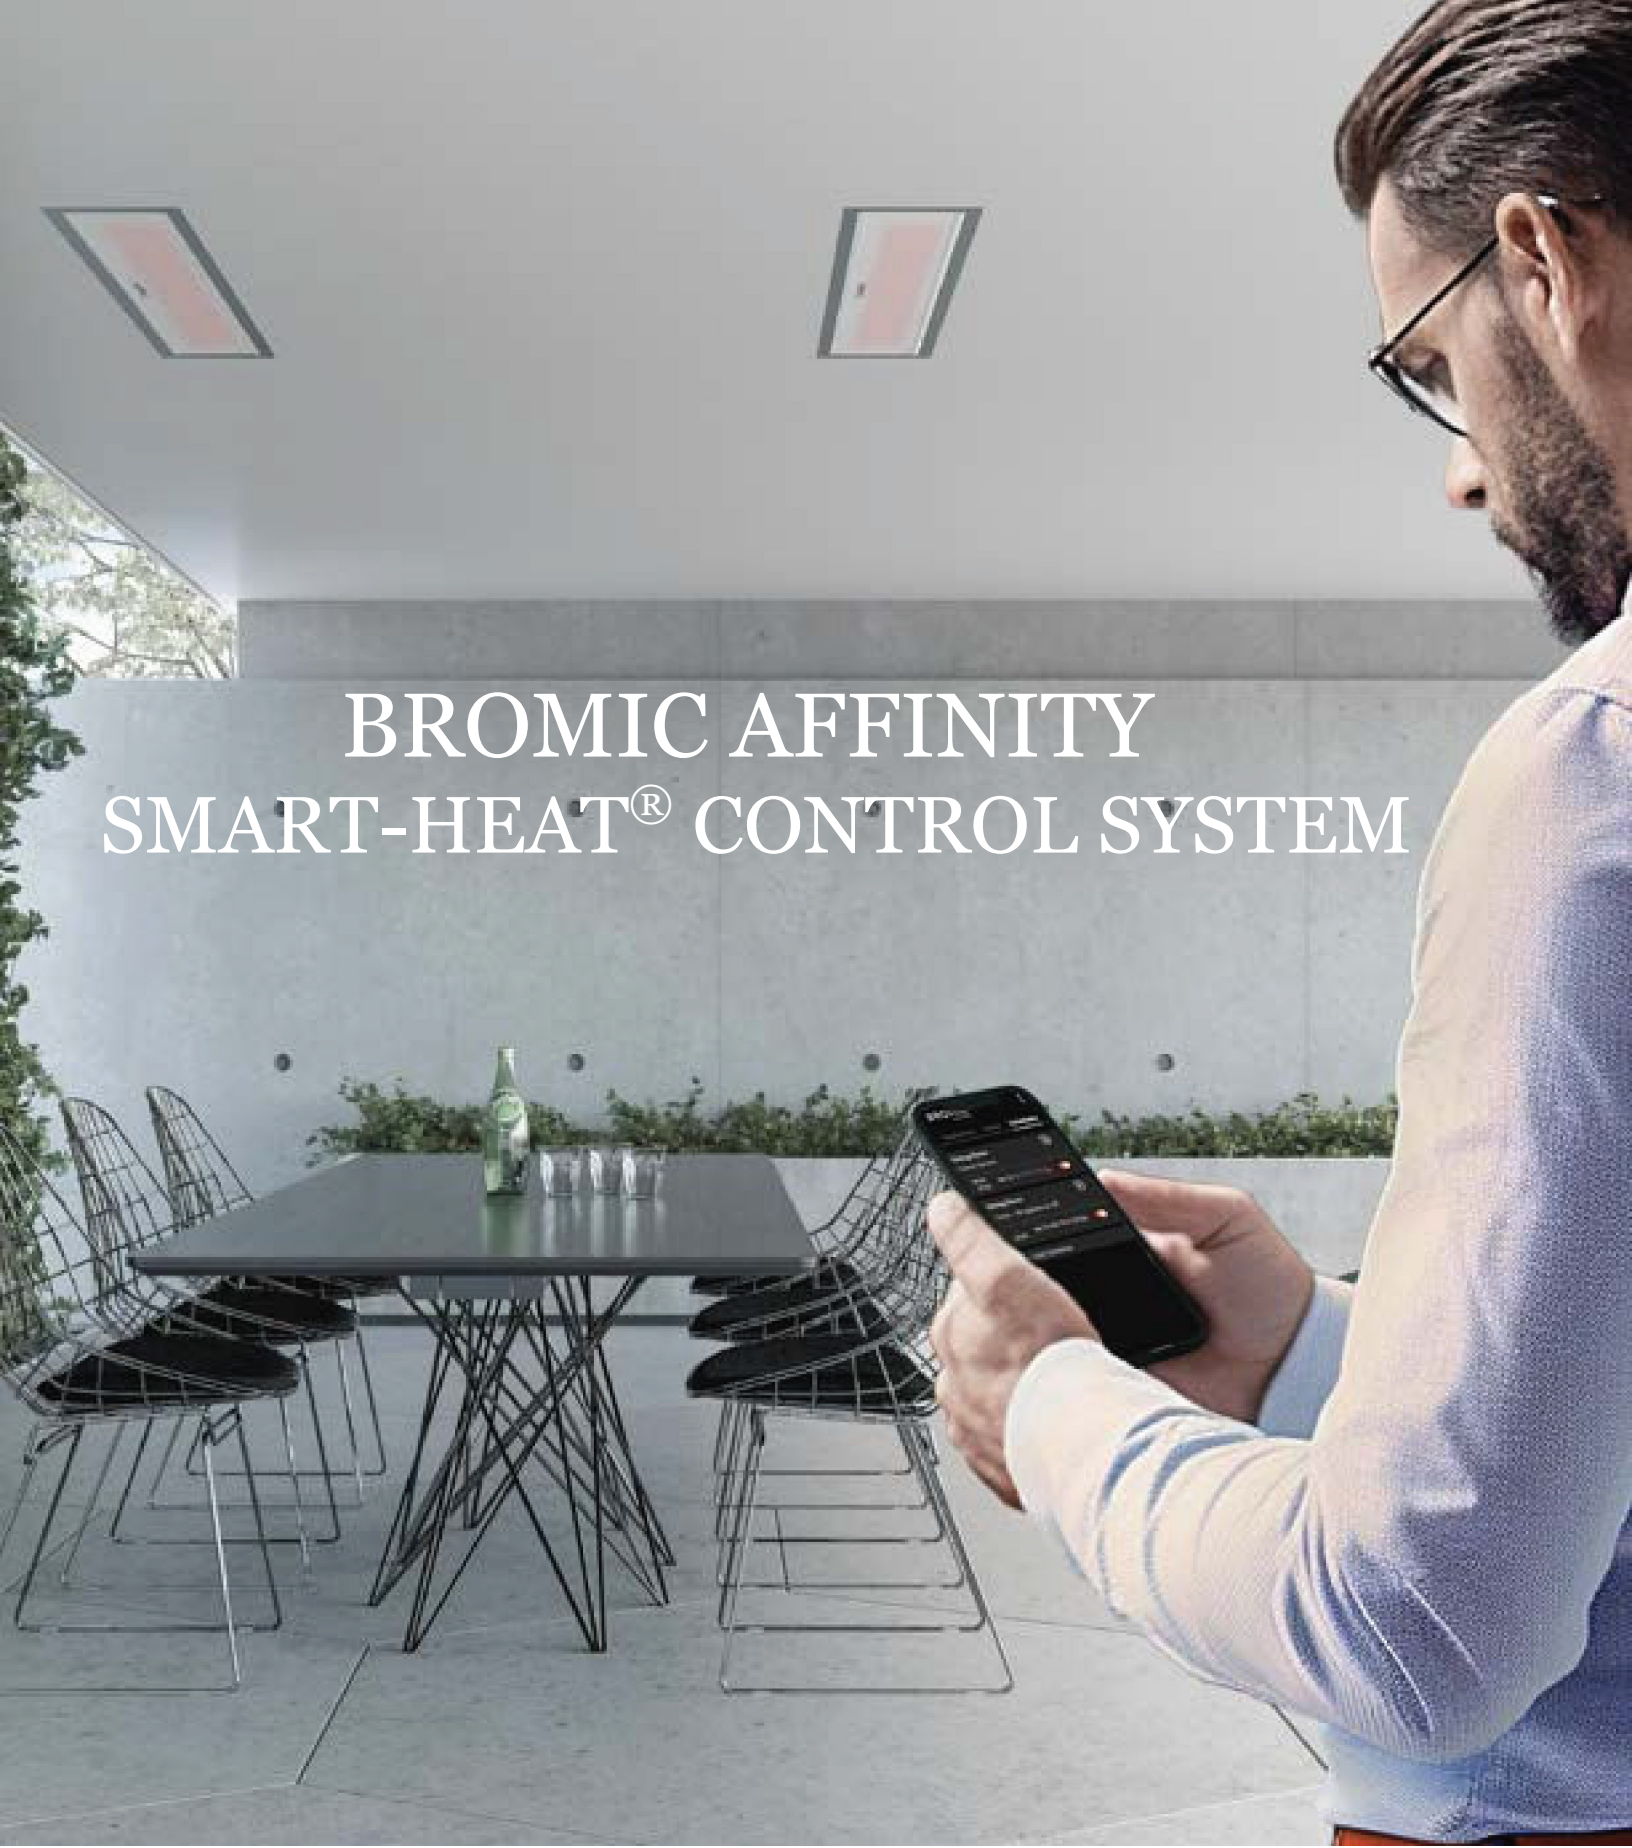

The Affinity Difference

One System. Complete Outdoor Heating Control

The Affinity Smart-Heat® Control System combines intelligent hardware with the Bromic Heating app, giving you seamless control of your outdoor heaters from anywhere. Adjust heat levels, create zones, automate schedules, and manage multiple spaces—all from a single connected platform.

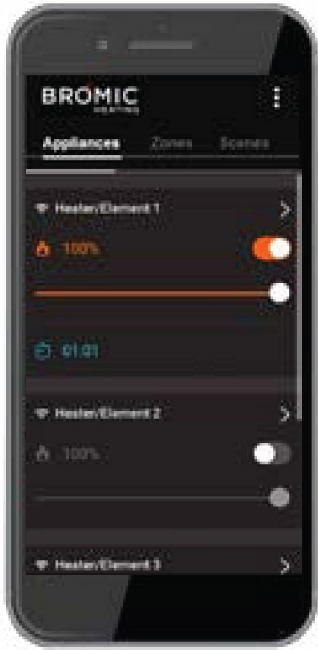

- ▶ On/Off and dimming controls
- ▶ Heater grouping and zones
- ▶ Timers and schedules
- ▶ Voice control
- ▶ Multi-site management
- ▶ Automation/BMS integration
- ▶ Wi-Fi, Bluetooth, and Ethernet connectivity

DIMMER SERIES

Designed for tailored outdoor heating, the Dimmer Series provides precise heat adjustment in 1% increments for compatible Bromic Platinum and Tungsten electric heaters.

FEATURES:

- Available in 1- and 2-channel output options
- Each channel controls up to 6000 W of power
- Precise adjustment of heat output

ECLIPSE SERIES

Designed for the Eclipse Collection, the Eclipse Series provides precise, incremental control of both heat and integrated LED lighting, allowing you to create the ideal outdoor atmosphere for any occasion.

FEATURES:

- Available in 1- and 5-channel options
- On/Off control of heat and incremental control of LED lighting for the 1-channel model
- Incremental control of heat and LED lighting for the 5-channel model

ON/OFF SERIES

Enables connected Bromic heaters to be turned on or off at full power with a single command. Ideal for projects that do not require heat adjustment.

FEATURES:

- Available in 1-, 2-, and 5-channel output options
- Compatible with all Bromic heaters except Eclipse
- Each channel controls up to 6000 W of power or 10 gas heaters



AFFINITY SMART-HEAT® CONTROL SYSTEM

SPECIFICATIONS



DIMMER SERIES

FOR BROMIC PLATINUM AND TUNGSTEN COLLECTION ELECTRIC HEATERS

MODEL NUMBER	BH3130061	BH3130062	BH3130063
NUMBER OF CHANNELS	1	2	5
VOLTAGE - MAX CAPACITY PER CHANNEL	208-277 V - 6000 W	208-277 V - 6000 W	3N~ 220/380 V - 6000 W 3N~ 230/400 V - 6000 W 3N~ 240/415 V - 6000 W 3~ 120/208 V - 6000 W 3N~ 277/480 V - 6000 W
PROTECTION RATING	IP54	IP54	IP54
DIMENSIONS	11.4 x 8.0 x 6.4"	11.4 x 8.0 x 6.4"	19.7 x 13.4 x 10.0"
WEIGHT	3.5 lbs	5.3 lbs	7.6 lbs

ECLIPSE SERIES

FOR BROMIC ECLIPSE ELECTRIC HEATERS

MODEL NUMBER	BH8380051	BH8380055
NUMBER OF CHANNELS	1	5
OPERATING CAPACITY / VOLTAGE	220-240 V - 4000 W	220-240 V - 6000 W (30 A max)
PROTECTION RATING	IP54	IP54
DIMENSIONS	11.4 x 8.0 x 4.4"	19.7 x 13.4 x 10.0"
WEIGHT	3.5 lbs	33.1 lbs

ON/OFF SERIES

FOR BROMIC PLATINUM AND TUNGSTEN COLLECTION GAS & ELECTRIC HEATERS

MODEL NUMBER	BH3130051	BH3130052	BH3130053
NUMBER OF CHANNELS	1	2	5
VOLTAGE - MAX CAPACITY PER CHANNEL	100-127 V - 1000 W 208-277 V - 6000 W	100-127 V - 1000 W 208-277 V - 6000 W	3N~ 220/380 V - 6000 W 3N~ 230/400 V - 6000 W 3N~ 240/415 V - 6000 W 3N~ 277/480 V - 6000 W 3~ 120/208 V - 6000 W
PROTECTION RATING	IP54	IP54	IP54
DIMENSIONS	11.4 x 8.0 x 4.4"	11.4 x 8.0 x 4.4"	19.7 x 13.4 x 8.0"
WEIGHT	3.1 lbs	3.6 lbs	24.3 lbs